

**LONG BEACH CITY COLLEGE DISTRICT
CONTRACTS MANAGEMENT DEPARTMENT**

**4901 EAST CARSON STREET
LONG BEACH, CA 90808
Ph. (562) 938-4843 Fax: (562) 938-4640**

**BID C2194A ADA SITE BARRIER REMOVAL PROJECT
AT THE
LIBERAL ARTS CAMPUS**

ADDENDUM NO # 1

OCTOBER 19, 2020

This Addendum forms a part of the Contract Documents and modifies the original Contract Documents. Acknowledge receipt of the Addendum on Section 1.2 of the Bid Proposal. Failure to do so may result in the bid being deemed non-responsive.

Note: It is the responsibility of all bidders to notify all subcontractors from whom they request bids and from whom they accept bids of all changes contained in this addendum.

ADDENDUM NO. 1 CONTENTS

- I. CHANGES TO NOTICE CALLING FOR BID**
- II. PRE-BID INQUIRIES (PBI'S) AND RESPONSES**
- III. REVISIONS TO DRAWINGS**
- IV. ATTACHMENTS**

I. CHANGES TO NOTICE CALL FOR BID

1. Revise **Latest Time/Date for Electronic Submission of Bid Proposals** from October 22, 2020, at 11:00 AM to **October 27, 2020, at 11:00 AM.**

II. PRE-BID INQUIRIES (PBI'S) AND RESPONSES

1. Q: For commercial general liability insurance policy: We have limit \$1,000,000 and aggregate \$2,000,000. However, we have umbrella liability cover \$5,000,000. Could we still be qualified to bid?

A: Contractors must obtain and maintain the insurance coverages at the minimum coverage amounts set forth in Article 17.11.1. Any coverages that fall below the minimums set forth will not be acceptable, regardless of any umbrella liability coverage.

2. Q: C1.18 - Between 41.9 – 42.1, there is a tree that isn't shown on the plans. What happens to this tree?

A: Existing tree is not in conflict with proposed sidewalk improvements, and is to be protected in place.

3. Q: C1.16 - In front of Building D and Building E, there are several light post in the planter area. What happens with these light poles? Will be put a curb around them?

A: Curb to be installed around a light pole base. Provide curb drain at depressed light pole base area. See Addendum 1 Sheet C1.16.

4. Q: C1.15 – In front of Building E, there is a drain in the back of sidewalk the plans make no mention of it? What happens with this drain?

A: Drain to be removed and replaced with new drain body. Tie into existing inlet and outlet connections. At the wall above the existing trench drain, there are four existing weepholes: two existing 1" weepholes and two existing 2.5" weepholes. The 1" weepholes shall be plugged as they will be below the proposed back of walk. See Addendum 1 Sheet C1.15.

5. Q: C1.24 - In courtyard of Building S, there is existing brick. The plans show color concrete can you clarify?

A: Existing brick pavers will be removed and replaced in kind at proposed grades. See Addendum 1 Sheet C1.24.

III. REVISIONS TO DRAWINGS

1. C0.01, Title Sheet: Remove sheet in its entirety and replace with attached Addendum No. 1 C0.01 dated 10.16.20.
2. C1.14, ADA Improvement Plan: Remove sheet in its entirety and replace with attached Addendum No. 1 C0.11 dated 10.16.20.
3. C1.15, ADA Improvement Plan: Remove sheet in its entirety and replace with attached Addendum No. 1 C0.15 dated 10.16.20.
4. C1.16, ADA Improvement Plan: Remove sheet in its entirety and replace with attached Addendum No. 1 C0.16 dated 10.16.20.
5. C1.18, ADA Improvement Plan: Remove sheet in its entirety and replace with attached Addendum No. 1 C0.18 dated 10.16.20.
6. C1.24, ADA Improvement Plan: Remove sheet in its entirety and replace with attached Addendum No. 1 C0.24 dated 10.16.20.

IV. ATTACHMENTS

C0.01, C1.14, C1.15, C1.16, C1.18, C1.24

END OF ADDENDUM NO. 1

LONG BEACH CITY COLLEGE DISTRICT

Alan Moloney

Alan Moloney
Deputy Director Purchasing & Contracts

P:\2017\1706617 Long Beach City College Liberal Arts Campus ADA Improvements\DWGS\Sheet\1706617-C-01GN.dwg

GENERAL NOTES:

- WORK SHOWN HEREON SHALL BE DONE IN ACCORDANCE WITH THE "STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION," LATEST EDITION AND SUPPLEMENTS, THE CALIFORNIA BUILDING CODE (EXCAVATION AND GRADING), AND CITY OF LONG BEACH LOCAL ORDINANCES AS APPLICABLE.
- PER OWNER DIRECTION, NO PROJECT-SPECIFIC GEOTECHNICAL RECOMMENDATIONS HAVE BEEN PROVIDED. GEOTECHNICAL RECOMMENDATIONS FOR GRADING AND PAVING HAVE BEEN PROVIDED BASED ON A PREVIOUS GEOTECHNICAL REPORT PROVIDED BY THE OWNER, "REPORT ON GEOTECHNICAL INVESTIGATION SITE OF PROPOSED MUSIC & THEATER BUILDING TO REPLACE EXISTING BUILDINGS C & H LONG BEACH CITY COLLEGE 4901 E CARSON ST LONG BEACH, CALIFORNIA" DATED JANUARY 14, 2020 PREPARED BY SMITH-EMERY LABORATORIES.
- EXISTING TOPOGRAPHY SHOWN HEREON WAS TAKEN FROM A SURVEY DATED JUNE 5, 2018 BY KPFF.
- THE CONTRACTOR SHALL ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR THE JOB SITE CONDITIONS, INCLUDING SAFETY OF ALL PERSONS AND PROPERTY, DURING THE COURSE OF CONSTRUCTION OF THIS PROJECT. THIS REQUIREMENT SHALL APPLY CONTINUOUSLY, AND SHALL NOT BE LIMITED TO NORMAL WORKING HOURS.
- PRIOR TO COMMENCING CONSTRUCTION, THE CONTRACTOR SHALL VERIFY ALL JOIN CONDITIONS FOR GRADING, DRAINAGE AND UNDERGROUND FACILITIES INCLUDING LOCATION AND ELEVATION OF EXISTING UNDERGROUND FACILITIES AT CROSSINGS WITH PROPOSED UNDERGROUND FACILITIES. IF CONDITIONS DIFFER FROM THOSE SHOWN ON THE PLANS, THE CONTRACTOR SHALL NOTIFY THE ENGINEER AND SHALL NOT BEGIN CONSTRUCTION UNTIL THE CHANGED CONDITIONS HAVE BEEN EVALUATED.
- ALL DRAWINGS ARE CONSIDERED TO BE A PART OF THE CONTRACT DOCUMENTS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE REVIEW AND COORDINATION OF ALL DRAWINGS AND SPECIFICATIONS PRIOR TO THE START OF CONSTRUCTION. ANY DISCREPANCIES THAT OCCUR SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT PRIOR TO THE START OF CONSTRUCTION SO THAT A CLARIFICATION CAN BE ISSUED. ANY WORK PERFORMED IN CONFLICT WITH THE CONTRACT DOCUMENTS OR ANY CODE REQUIREMENTS SHALL BE CORRECTED BY THE CONTRACTOR AT THEIR OWN EXPENSE AND AT NO EXPENSE TO THE OWNER OR ARCHITECT.
- THE ENGINEER PREPARING THESE PLANS WILL NOT BE RESPONSIBLE FOR, OR LIABLE FOR, UNAUTHORIZED CHANGES TO OR USES OF THESE PLANS. ALL CHANGES TO THE PLANS MUST BE IN WRITING AND MUST BE APPROVED BY THE PREPARER OF THESE PLANS.
- NOTES AND DETAILS ON DRAWINGS SHALL TAKE PRECEDENCE OVER GENERAL NOTES AND TYPICAL DETAILS, WHERE NO DETAILS ARE GIVEN, CONSTRUCTION SHALL BE AS SHOWN FOR SIMILAR WORK.
- THE EXISTENCE, LOCATION AND CHARACTERISTICS OF UNDERGROUND UTILITY INFORMATION SHOWN ON THESE PLANS HAVE BEEN OBTAINED FROM A REVIEW OF AVAILABLE RECORD DATA. NO REPRESENTATION IS MADE AS TO THE ACCURACY OR COMPLETENESS OF SAID UTILITY INFORMATION. THE CONTRACTOR SHALL TAKE PRECAUTIONARY MEASURES TO PROTECT THE UTILITY LINES SHOWN AND ANY OTHER LINES NOT OF RECORD OR NOT SHOWN ON THESE PLANS.
- IF AT ANY TIME DURING GRADING OPERATIONS, ANY UNFAVORABLE GEOLOGICAL CONDITIONS ARE ENCOUNTERED, GRADING IN THAT AREA WILL STOP UNTIL APPROVED CORRECTIVE MEASURES ARE OBTAINED.
- THE PROPOSED GRADE IS THE FINAL GRADE AND NOT THE ROUGH GRADE. THE CONTRACTOR SHALL SUBTRACT THE THICKNESS OF THE PAVED SECTION AND/OR LANDSCAPE TOPSOIL SECTION TO ARRIVE AT THE ROUGH GRADE ELEVATION.
- STRAIGHT GRADE SHALL BE MAINTAINED BETWEEN CONTOUR LINES AND SPOT ELEVATIONS UNLESS OTHERWISE SHOWN ON THE PLANS.
- ALL DEBRIS AND FOREIGN MATERIAL SHALL BE REMOVED FROM THE SITE AND DISPOSED OF AT APPROVED DISPOSAL SITES. THE CONTRACTOR SHALL OBTAIN NECESSARY PERMITS FOR THE TRANSPORTATION OF MATERIAL TO AND FROM THE SITE.
- ALL FILL SOILS OR SOILS DISTURBED OR OVEREXCAVATED DURING CONSTRUCTION SHALL BE COMPACTED PER THE REQUIREMENTS OF THE SOILS REPORT BUT NOT LESS THAN 90% MAXIMUM DENSITY AS DETERMINED BY A.S.T.M. SOIL COMPACTION TEST D-1557.
- THE CONTRACTOR SHALL OBTAIN AN O.S.H.A. PERMIT FROM THE CALIFORNIA DIVISION OF INDUSTRIAL SAFETY PRIOR TO THE CONSTRUCTION OF TRENCHES OR EXCAVATIONS WHICH ARE FIVE FEET OR DEEPER.
- DIMENSIONS TO PIPELINES ARE TO CENTERLINE UNLESS OTHERWISE NOTED.
- ALL WATER LINES SHALL BE INSTALLED WITH 36" MINIMUM COVER FROM TOP OF PIPE TO FINISHED GRADE, UNLESS OTHERWISE NOTED.
- THRUST BLOCKS SHALL BE INSTALLED AT WATERLINE HORIZONTAL AND VERTICAL BENDS, TEES, CAPPED ENDS AND REDUCERS ACCORDING TO THE DETAILS PROVIDED ON THESE PLANS.
- CONSTRUCTION STAKING FOR IMPROVEMENTS SHOWN ON THESE PLANS SHALL BE PERFORMED BY A LICENSED LAND SURVEYOR. CONSTRUCTION STAKING SURVEYOR SHALL BE RESPONSIBLE FOR COORDINATION OF THESE PLANS WITH SOURCE DRAWINGS PREPARED BY ARCHITECT, LANDSCAPE ARCHITECT, STRUCTURAL ENGINEER, MEP CONSULTANT AND ANY OTHER DISCIPLINE PRIOR TO START OF STAKING AND CONSTRUCTION. ANY DISCREPANCIES THAT OCCUR SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT PRIOR TO THE START OF CONSTRUCTION SO THAT A CLARIFICATION CAN BE ISSUED.
- THE CONTRACTOR SHALL REPLACE ALL EXISTING IMPROVEMENTS DAMAGED DURING CONSTRUCTION TO MATCH EXISTING, INCLUDING PERMANENT TRENCH RESURFACING.
- CONTRACTOR TO CONTACT UNDERGROUND SERVICE ALERT (800-227-2600) PRIOR TO EXCAVATION.
- ALL DIMENSIONS ARE IN FEET OR DECIMALS THEREOF.
- ALL CURB DIMENSIONS AND RADII ARE TO PAVEMENT FACE OF CURB.
- CONTRACTOR TO BE AWARE OF ALL OVERHEAD LINES AT ALL TIMES, SO AS NOT TO DISTURB THEM.
- WATER SHALL BE PROVIDED ONSITE AND USED TO CONTROL DUST DURING CONSTRUCTION OPERATIONS.
- CONTRACTOR SHALL OBTAIN ANY NECESSARY PERMITS FROM THE CITY OF LONG BEACH FOR ALL WORK WITHIN THE PUBLIC RIGHT-OF-WAY.
- STORM DRAINAGE SYSTEMS SHOWN ON THESE PLANS HAVE BEEN DESIGNED FOR THE FINAL SITE CONDITION AT COMPLETION OF THE PROJECT. THE CONTRACTOR IS RESPONSIBLE FOR MAINTAINING ADEQUATE DRAINAGE OF THE SITE, DURING INTERIM CONDITIONS OF CONSTRUCTION.
- CONTRACTOR SHALL OBTAIN ALL REQUIRED PERMITS, INCLUDING NPDES, FROM THE APPROPRIATE JURISDICTIONAL AGENCIES FOR DISCHARGE OF GROUNDWATER THAT MAY BE NECESSARY TO ACCOMPLISH EXCAVATIONS SHOWN ON THESE PLANS.
- AT ALL LOCATIONS WHERE NEW PAVING JOINS EXISTING SITE PAVING, CONTRACTOR SHALL VERIFY JOINS IN FIELD. CONTRACTOR SHALL PROVIDE TRANSITION TO EXISTING AT LESS THAN 1/8 INCH BY GRINDING OR FILLING ADJACENT NON-COMPLIANT SLOPE AT ALL JOIN LOCATIONS.



1-800-227-2600
CALL USA/SC FOR
UNDERGROUND LOCATING
48 HOURS BEFORE YOU
DIG!

IMPORTANT NOTICE
SECTION 4216/4217 OF THE GOVERNMENT CODE
REQUIRES A DIGALERT IDENTIFICATION NUMBER
BE ISSUED BEFORE A "PERMIT TO EXCAVATE"
WILL BE VALID. FOR YOUR DIGALERT I.D.
NUMBER CALL UNDERGROUND SERVICE ALERT
TOLL FREE 1-800-227-2600 TWO WORKING
DAYS BEFORE YOU DIG

LEGEND:

GENERAL

- CIVIL LIMITS OF WORK
- SHEET MATCH LINE

ANNOTATION

- 100.00 XX SURFACE ELEVATION/UTILITY ELEVATION
- (100.00)XX EXISTING SURFACE ELEVATION/UTILITY ELEVATION
- XX CONSTRUCTION NOTE
- 2.0% FLOW (DIRECTION AND GRADE)
- 2:1 SLOPE (DIRECTION AND RUN-RISE)
- XX HORIZONTAL CONTROL POINT LABEL
- CX CURVE DATA LABEL
- FF=100.00 PAD/FINISHED FLOOR ELEVATION

SITE

- CURB/BACK OF CURB/GUTTER
- RETAINING WALL/SITE WALL
- PROPERTY LINE/RIGHT OF WAY
- CENTER LINE
- FENCE
- TO BE DEMOLISHED

EROSION CONTROL

- SANDBAGS
- PROPOSED BUILDING EXCAVATION OUTLINE
- EXISTING DRAINAGE DIRECTION OF FLOW
- PROTECT TREE IN PLACE

GRADING

- 100 PROPOSED MAJOR CONTOUR
- 102 PROPOSED MINOR CONTOUR
- FLOW LINE
- GB GRADE BREAK LINE
- R RIDGE LINE
- EARTHEN SWALE
- SAWCUT
- GRADING BENCH
- GRADED SLOPE (HORIZONTAL:VERTICAL)

UTILITY

- SS SANITARY SEWER
- W WATER
- DW DOMESTIC WATER
- FW FIRE WATER
- SD STORM DRAIN
- G GAS
- E ELECTRIC
- T TELEPHONE
- PERFORATED PIPE
- POINT OF CONNECTION
- COORDINATION POINT
- CAP OR PLUG
- UTILITY MANHOLE
- UTILITY CLEANOUT
- STORM DRAIN INLET
- AREA DRAIN/PLANTER DRAIN
- TRENCH DRAIN
- FIRE HYDRANT
- THRUST BLOCK
- FIRE DEPARTMENT CONNECTION (FDC)
- POST INDICATOR VALVE (PIV)
- WATER VALVE
- BACKFLOW ASSEMBLY
- UTILITY METER VAULT

ABBREVIATIONS:

AC	ASPHALTIC CONCRETE	MIN.	MINIMUM
BCR	BEGIN CURVE RETURN	MH	MANHOLE
BW	BACK OF WALK	(N)	NORTH
BLDG	BUILDING	NTS	NOT TO SCALE
BM	BENCH MARK	PA	PLANTER AREA
BOS	BOTTOM OF STAIRS	POC	POINT OF CONNECTION
BMP	BEST MANAGEMENT PRACTICES	PIV	POST INDICATOR VALVE
CB	CATCH BASIN	PCC	POINT OF COMPOUND CURVE
CI	CAST IRON	PRC	POINT OF REVERSE CURVE
CJ	CONTROL JOINT	PRV	PRESSURE REDUCING VALVE
CL	CENTER LINE	PVC	POLYVINYL CHLORIDE
CMU	CONCRETE MASONRY UNIT	R	RADIUS
CO	CLEANOUT	RCIP	RECTANGULAR CAST IRON PIPE
CONC	PORTLAND CEMENT CONCRETE	RD	ROOF DRAIN
CF	CURB FACE	RW	RIGHT-OF-WAY
DW	DOMESTIC WATER	(S)	SOUTH
(E)	EAST	S=	SLOPE EQUALS
ECR	END CURVE RETURN	SD	STORM DRAIN
EG	EDGE OF CUTTER	SSMH	SANITARY SEWER MANHOLE
EJ	EXPANSION JOINT	SS	SANITARY SEWER
EL. OR ELEV	ELEVATION	STD	STANDARD
ELEC	ELECTRIC, ELECTRICAL	SDMH	STORM DRAIN MANHOLE
EX. OR EXIST.	EXISTING	TC	TOP OF CURB
FDC	FIRE DEPARTMENT CONNECTION	TEL	TELEPHONE
FF	FINISHED FLOOR	TG	TOP OF GRATE
FG	FINISHED GRADE (LANDSCAPE)	TOS	TOP OF STAIRS
FS	FINISHED SURFACE (HARDSCAPE)	TW	TOP OF WALL
FH	FIRE HYDRANT	TS	TRAFFIC SIGNAL
FL	FLOW LINE	TSB	TRAFFIC SIGNAL BOX
FT	FOOT OR FEET	TYP	TYPICAL
FU	FIXTURE UNITS	TV	TELEVISION
FW	FIRE WATER	VIF	VERIFY IN FIELD
GPM	GALLONS PER MINUTE	VL	VAULT
GV	GATE VALVE	VCP	VITRIFIED CLAY PIPE
HDPE	HIGH DENSITY POLYETHYLENE	(W)	WEST
HP	HIGH POINT	W	WATER
INV.	INVERT	WM	WATER METER
LP	LOW POINT	WV	WATER VALVE
MAX.	MAXIMUM		

PATTERN LEGEND:

- CONCRETE PAVING (REFER TO SHEET C5.00 FOR DETAILS)
- ASPHALT (REFER TO SHEET C5.00 FOR DETAILS)
- PA PLANTER AREA/LANDSCAPE (REFER TO LANDSCAPING PLANS FOR DETAILS)
- TRUNCATED DOMES


PROJECT DIRECTORY:

ARCHITECT:
DLR GROUP
700 SOUTH FLOWER STREET
SUITE 2200
LOS ANGELES, CA 90017
TEL: 213.800.9400
CONTACT: SHOJI TAKESHIMA

CIVIL ENGINEER:
KPFF CONSULTING ENGINEERS
700 SOUTH FLOWER STREET
SUITE 2100
LOS ANGELES, CA 90017
TEL: 213.418.0201
FAX: 213.266.5294
CONTACT: OSCAR GONZALEZ


SHEET INDEX:

CIVIL DRAWINGS	
C0.01	TITLE SHEET
C1.10	OVERALL ADA IMPROVEMENT PLAN
C1.11	ADA IMPROVEMENT PLAN
C1.12	ADA IMPROVEMENT PLAN
C1.13	ADA IMPROVEMENT PLAN
C1.14	ADA IMPROVEMENT PLAN
C1.15	ADA IMPROVEMENT PLAN
C1.16	ADA IMPROVEMENT PLAN
C1.17	ADA IMPROVEMENT PLAN
C1.18	ADA IMPROVEMENT PLAN
C1.19	ADA IMPROVEMENT PLAN
C1.20	ADA IMPROVEMENT PLAN
C1.21	ADA IMPROVEMENT PLAN
C1.22	ADA IMPROVEMENT PLAN
C1.23	ADA IMPROVEMENT PLAN
C1.24	ADA IMPROVEMENT PLAN
C1.25	ADA IMPROVEMENT PLAN
C1.26	ADA IMPROVEMENT PLAN
C5.00	CIVIL DETAILS
C5.01	CIVIL DETAILS

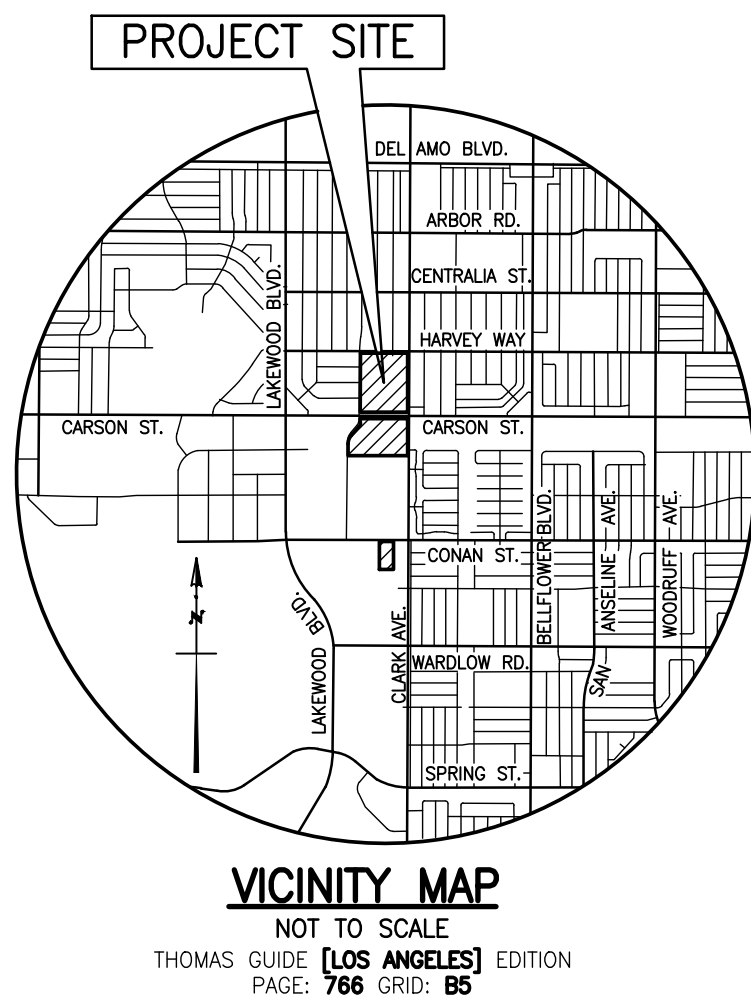

kpff
700 South Flower Street
Suite 2100
Los Angeles, CA 90017
O: 213.418.0201
F: 213.266.5294
www.kpff.com

DLR Group

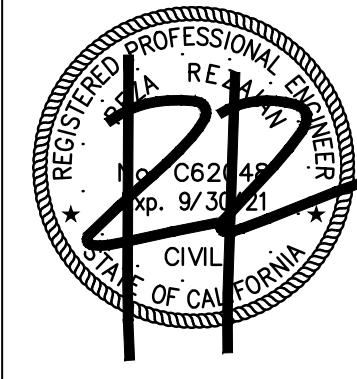

LBCC - LIBERAL ART CAMPUS
BARRIER REMOVAL PROJECT

4901 East Carson St., Long Beach, CA 90808

DSA SUBMITTAL


Issue Date 05/15/20
Revisions
1 Addendum 01 10/16/2020

75-18208-03

TITLE SHEET

C0.01


P:\2017\1700617 Long Beach City College Liberal Arts Campus ADA Improvements\DWGS\Sheet\1700617-C-1-14GP.dwg

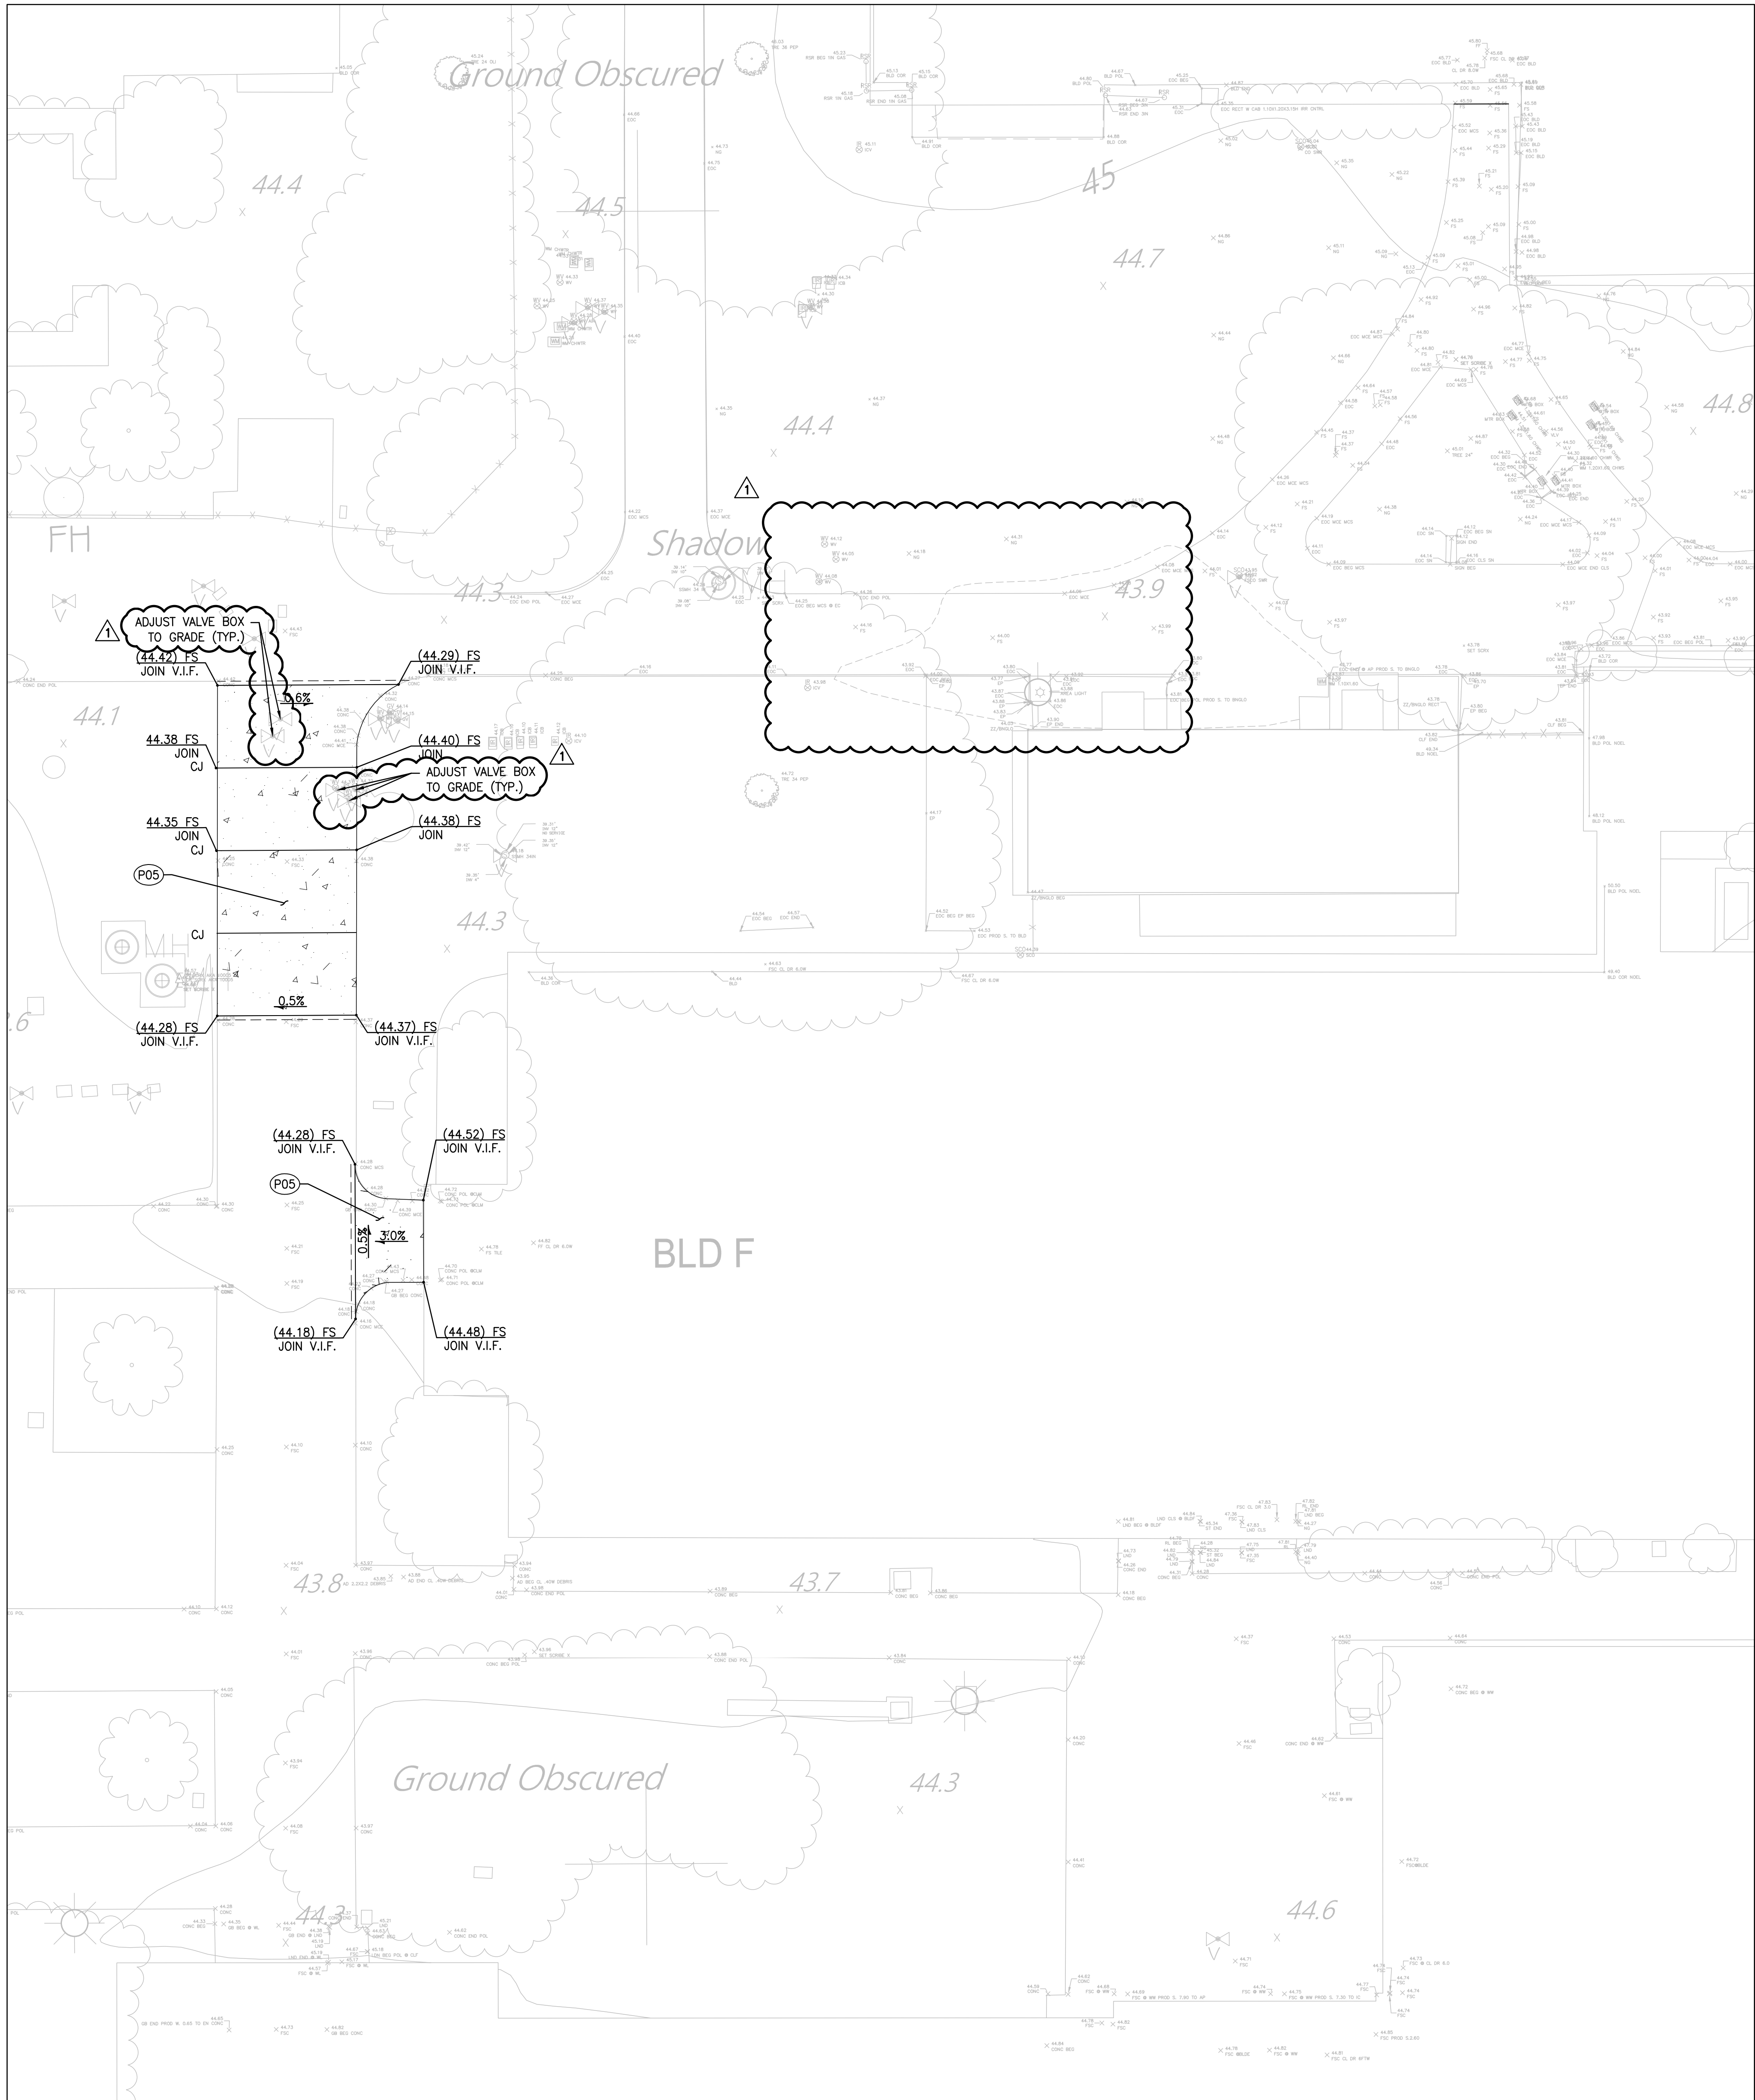



LEGEND

- LIMIT OF WORK
- - - PROPERTY LINE
- - - SAWCUT AND JOIN
- SD STORM DRAIN
- - - PATH OF TRAVEL - FOR INFORMATIONAL PURPOSES ONLY
- CONCRETE PAVING (REFER TO SHEET C5.00 FOR DETAILS)
- ASPHALT (REFER TO SHEET C5.00 FOR DETAILS)
- PLANTER AREA/LANDSCAPE (REFER TO LANDSCAPING PLANS FOR DETAILS)
- TRUNCATED DOME (REFER TO SHEET C5.00 FOR DETAILS)

NOTE TO CONTRACTOR/CONSTRUCTION SURVEYOR:
CONSTRUCTION STAKING FOR IMPROVEMENTS SHOWN ON THESE PLANS SHALL BE PERFORMED BY A LICENSED LAND SURVEYOR. ANY DISCREPANCIES BETWEEN THE PLANS AND FIELD CONDITIONS SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT PRIOR TO THE START OF CONSTRUCTION SO THAT A CLARIFICATION CAN BE ISSUED.

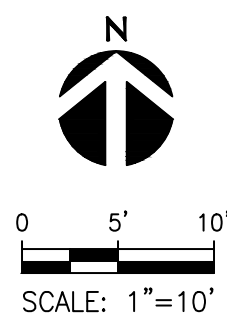

- PAVING CONSTRUCTION NOTES**
- P01 CONCRETE CURB. PER DETAIL 1 ON SHEET C5.00.
 - P02 CONCRETE CURB AND GUTTER. PER DETAIL 2 ON SHEET C5.00.
 - P03 CONCRETE VALLEY GUTTER. PER DETAIL 3 ON SHEET C5.00.
 - P04 ASPHALT CONCRETE PAVEMENT. PER DETAIL 9 ON SHEET C5.00.
 - P05 CONCRETE WALK. PER DETAIL 4 ON SHEET C5.00.
 - P06 CURB RAMP. PER DETAIL 5 ON SHEET C5.00. HANDRAILS PER ARCHITECTURAL PLAN 0.1 WHERE REQUIRED.
 - P07 CONCRETE STAIRS ON GRADE PER DETAIL 6 ON SHEET C5.00.
 - P08 TRENCH DRAIN PER DETAIL 7 ON SHEET C5.00.
 - P09 TRUNCATED DOMES PER DETAIL 8 ON SHEET C5.00. CAST-IN-PLACE YELLOW EXCEPT WHERE NOTED.
 - P10 ROLLED CURB PER DETAIL 3, SHEET C5.01.
 - P11 RESET EXISTING PAVERS.
 - P12 CONDITIONS MAY CHANGE PRIOR TO CONSTRUCTION DUE TO KINESIOLOGY FIELDS AND AQUATIC CENTER PROJECT.
 - P13 GRIND DOWN EDGE OF EXISTING CONCRETE WALK TO BE FLUSH WITH EXISTING GRADE TO PREVENT DIFFERENCE > 1/4".
 - P14 CONTROL JOINT PER DETAIL 1, SHEET C5.01.
 - P15 WHEEL STOP PER DETAIL 5, SHEET C5.01.
 - P16 REMOVE EXISTING BRICK PAVERS AND REPLACE TO MATCH EXISTING PATTERN AND COLOR. GRADE CONCRETE BASE TO PROPOSED GRADES HEREON. 4"x8" BRICK PAVERS GROUTED OVER CONCRETE BASE. PARQUET PATTERN.

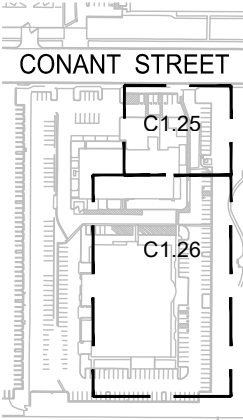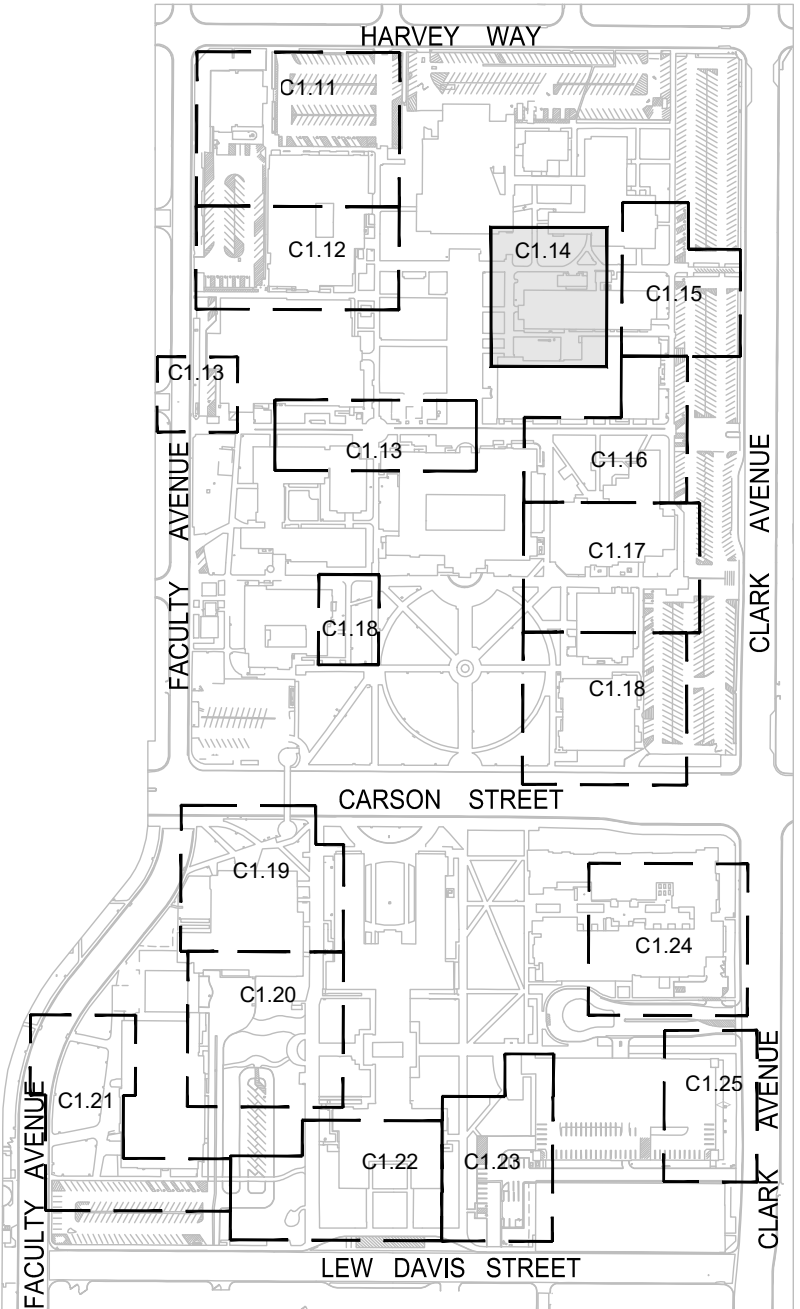

kpff
700 South Flower Street
Suite 2100
Los Angeles, CA 90017
O: 213.418.0201
F: 213.256.5294
www.kpff.com

DLR Group


LBCC - LIBERAL ARTS CAMPUS
BARRIER REMOVAL PROJECT
4801 East Carson St., Long Beach CA 90808

DSA SUBMITTAL

Issue Date 05.15.20
Revisions
1 Addendum 01 10.16.2020

75-18208-03
ADA IMPROVEMENT
PLAN

C1.14

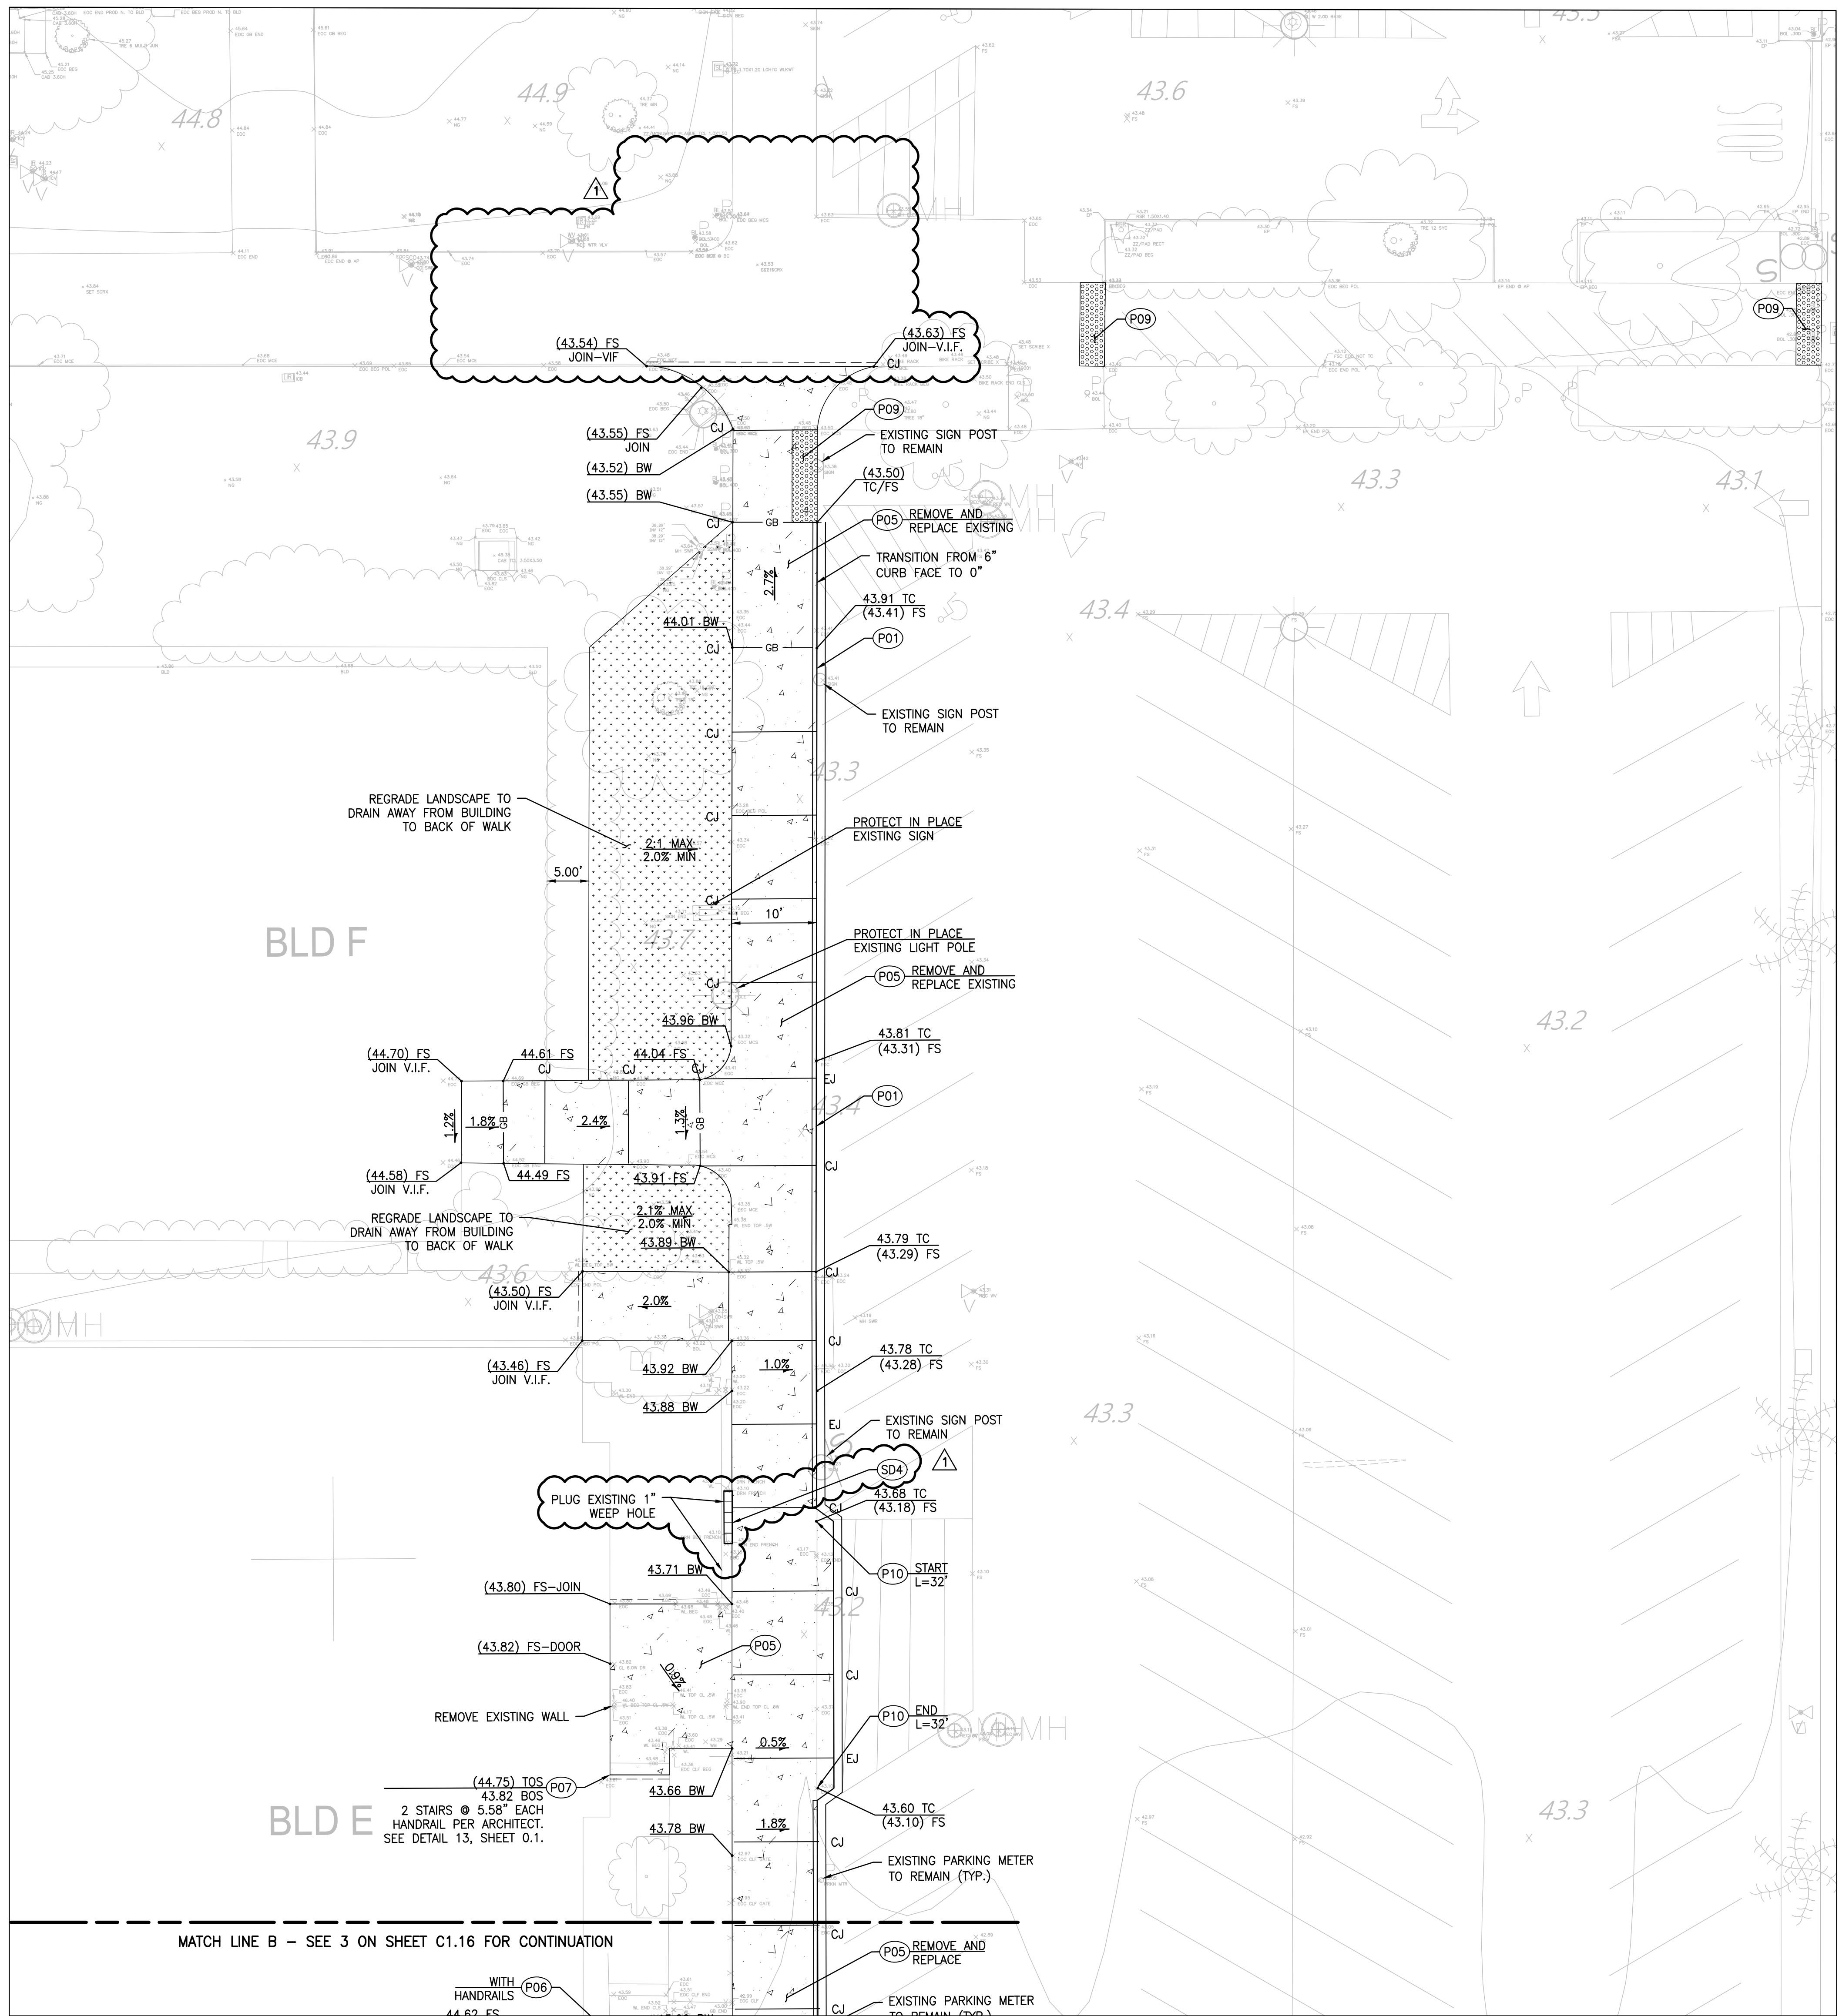

LEGEND

- LIMIT OF WORK
- PROPERTY LINE
- SAWCUT AND JOIN
- SD STORM DRAIN
- PATH OF TRAVEL - FOR INFORMATIONAL PURPOSES ONLY
- CONCRETE PAVING
(REFER TO SHEET C5.00 FOR DETAILS)
- ASPHALT
(REFER TO SHEET C5.00 FOR DETAILS)
- PLANTER AREA/LANDSCAPE
(REFER TO LANDSCAPING PLANS FOR DETAILS)
- TRUNCATED DOME
(REFER TO SHEET C5.00 FOR DETAILS)




NOTE TO CONTRACTOR/CONSTRUCTION SURVEYOR:
CONSTRUCTION STAKING FOR IMPROVEMENTS SHOWN ON THESE PLANS SHALL BE PERFORMED BY A LICENSED LAND SURVEYOR. ANY DISCREPANCIES BETWEEN THE PLANS AND FIELD CONDITIONS SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT PRIOR TO THE START OF CONSTRUCTION SO THAT A CLARIFICATION CAN BE ISSUED.

PAVING CONSTRUCTION NOTES

- (P01) CONCRETE CURB. PER DETAIL 1 ON SHEET C5.00.
- (P02) CONCRETE CURB AND GUTTER. PER DETAIL 2 ON SHEET C5.00.
- (P03) CONCRETE VALLEY GUTTER. PER DETAIL 3 ON SHEET C5.00.
- (P04) ASPHALT CONCRETE PAVEMENT. PER DETAIL 9 ON SHEET C5.00.
- (P05) CONCRETE WALK. PER DETAIL 4 ON SHEET C5.00.
- (P06) CURB RAMP. PER DETAIL 5 ON SHEET C5.00. HANDRAILS PER ARCHITECTURAL PLAN 0.1 WHERE REQUIRED.
- (P07) CONCRETE STAIRS ON GRADE PER DETAIL 6 ON SHEET C5.00.
- (P08) TRENCH DRAIN PER DETAIL 7 ON SHEET C5.00.
- (P09) TRUNCATED DOMES PER DETAIL 8 ON SHEET C5.00. CAST-IN-PLACE YELLOW EXCEPT WHERE NOTED.
- (P10) ROLLED CURB PER DETAIL 3, SHEET C5.01.
- (P11) RESET EXISTING PAVERS.
- (P12) CONDITIONS MAY CHANGE PRIOR TO CONSTRUCTION DUE TO KINESIOLOGY FIELDS AND AQUATIC CENTER PROJECT.
- (P13) GRIND DOWN EDGE OF EXISTING CONCRETE WALK TO BE FLUSH WITH EXISTING GRADE TO PREVENT DIFFERENCE > 1/4".
- (P14) CONTROL JOINT PER DETAIL 1, SHEET C5.01.
- (P15) WHEEL STOP PER DETAIL 5, SHEET C5.01.
- (P16) REMOVE EXISTING BRICK PAVERS AND REPLACE TO MATCH EXISTING PATTERN AND COLOR. GRADE CONCRETE BASE TO PROPOSED GRADES HEREON. 4"x8" BRICK PAVERS GROUTED OVER CONCRETE BASE. PARQUET PATTERN.

UTILITY CONSTRUCTION NOTES:

- STORM DRAIN**
- (SD1) PVC, SDR-35 STORM DRAIN PIPE PER DETAIL 10, SHEET C5.00. SIZE PER PLAN.
 - (SD2) AREA DRAIN, PER DETAIL 11, SHEET C5.00.
 - (SD3) 3" CAST IRON CURB DRAIN.
 - (SD4) ACO KLASSIKDRAIN K100 TRENCH DRAIN OR APPROVED EQUAL. TIE IN TO EXISTING OUTLET PIPE.

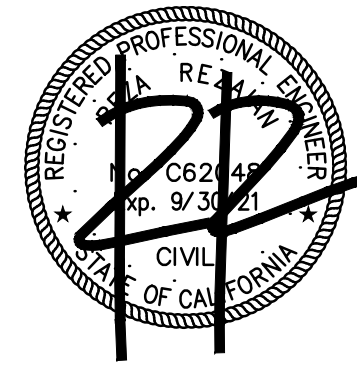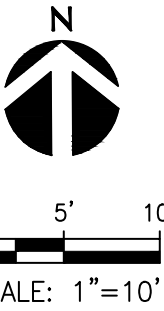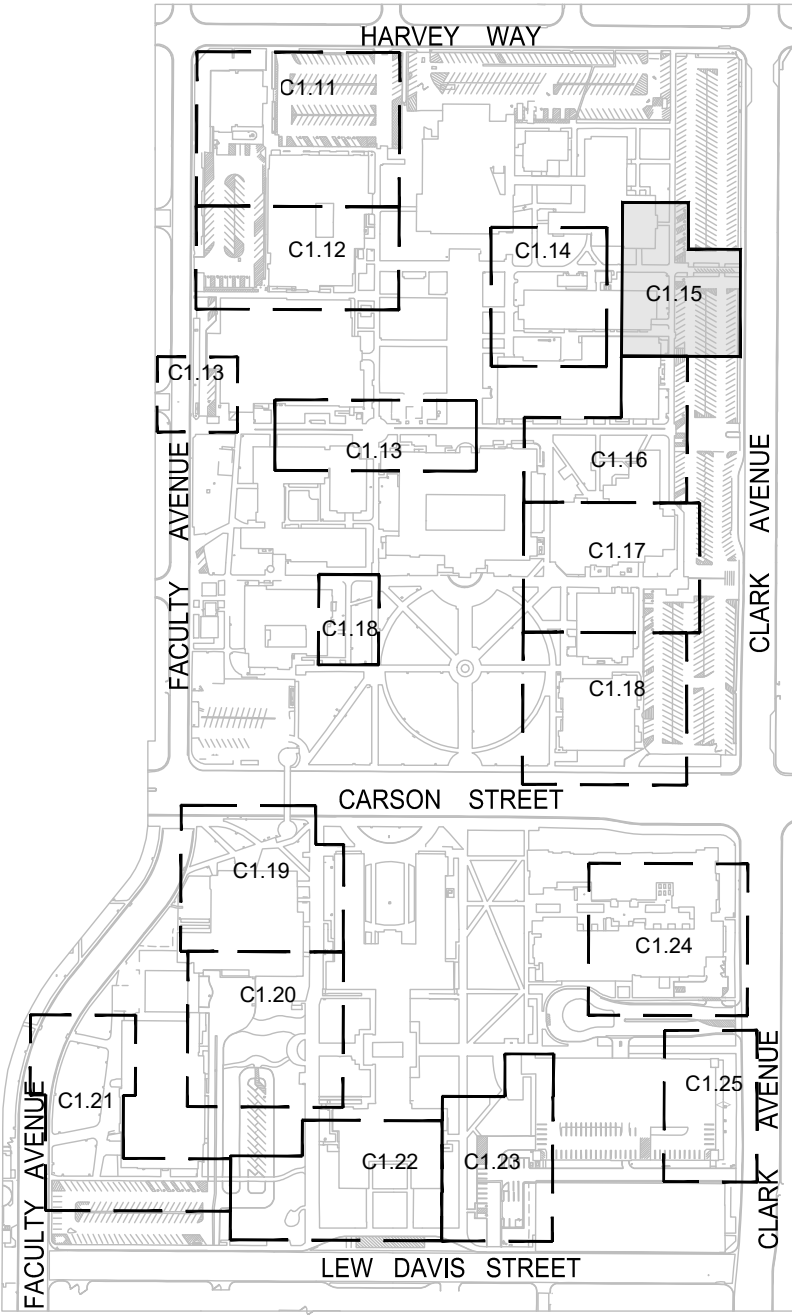

LEGEND

- LIMIT OF WORK
--- PROPERTY LINE
--- SAWCUT AND JOIN
--- SD --- STORM DRAIN
--- PATH OF TRAVEL --- FOR INFORMATIONAL PURPOSES ONLY
- CONCRETE PAVING
(REFER TO SHEET C5.00 FOR DETAILS)
- ASPHALT
(REFER TO SHEET C5.00 FOR DETAILS)
- PLANTER AREA/LANDSCAPE
(REFER TO LANDSCAPING PLANS FOR DETAILS)
- TRUNCATED DOME
(REFER TO SHEET C5.00 FOR DETAILS)





NOTE TO CONTRACTOR/CONSTRUCTION SURVEYOR:
CONSTRUCTION STAKING FOR IMPROVEMENTS SHOWN ON THESE PLANS SHALL BE PERFORMED BY A LICENSED LAND SURVEYOR. ANY DISCREPANCIES BETWEEN THE PLANS AND FIELD CONDITIONS SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT PRIOR TO THE START OF CONSTRUCTION SO THAT A CLARIFICATION CAN BE ISSUED.

PAVING CONSTRUCTION NOTES

- (P01) CONCRETE CURB. PER DETAIL 1 ON SHEET C5.00.
(P02) CONCRETE CURB AND GUTTER. PER DETAIL 2 ON SHEET C5.00.
(P03) CONCRETE VALLEY GUTTER. PER DETAIL 3 ON SHEET C5.00.
(P04) ASPHALT CONCRETE PAVEMENT. PER DETAIL 9 ON SHEET C5.00.
(P05) CONCRETE WALK. PER DETAIL 4 ON SHEET C5.00.
(P06) CURB RAMP. PER DETAIL 5 ON SHEET C5.00. HANDRAILS PER ARCHITECTURAL PLAN 0.1 WHERE REQUIRED.
(P07) CONCRETE STAIRS ON GRADE PER DETAIL 6 ON SHEET C5.00.
(P08) TRENCH DRAIN PER DETAIL 7 ON SHEET C5.00.
(P09) TRUNCATED DOMES PER DETAIL 8 ON SHEET C5.00. CAST-IN-PLACE YELLOW EXCEPT WHERE NOTED.
(P10) ROLLED CURB PER DETAIL 3, SHEET C5.01.
(P11) RESET EXISTING PAVERS.
(P12) CONDITIONS MAY CHANGE PRIOR TO CONSTRUCTION DUE TO KINESIOLOGY FIELDS AND AQUATIC CENTER PROJECT.
(P13) GRIND DOWN EDGE OF EXISTING CONCRETE WALK TO BE FLUSH WITH EXISTING GRADE TO PREVENT DIFFERENCE > 1/4".
(P14) CONTROL JOINT PER DETAIL 1, SHEET C5.01.
(P15) WHEEL STOP PER DETAIL 5, SHEET C5.01.
(P16) REMOVE EXISTING BRICK PAVERS AND REPLACE TO MATCH EXISTING PATTERN AND COLOR. GRADE CONCRETE BASE TO PROPOSED GRADES HEREON. 4"x8" BRICK PAVERS GROUTED OVER CONCRETE BASE. PARQUET PATTERN.

UTILITY CONSTRUCTION NOTES:

- STORM DRAIN
(SD1) PVC, SDR-35 STORM DRAIN PIPE PER DETAIL 10, SHEET C5.00. SIZE PER PLAN.
(SD2) AREA DRAIN PER DETAIL 11, SHEET C5.00.
(SD3) 3" CAST IRON CURB DRAIN.

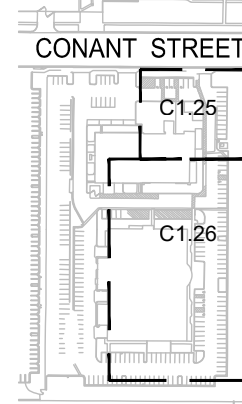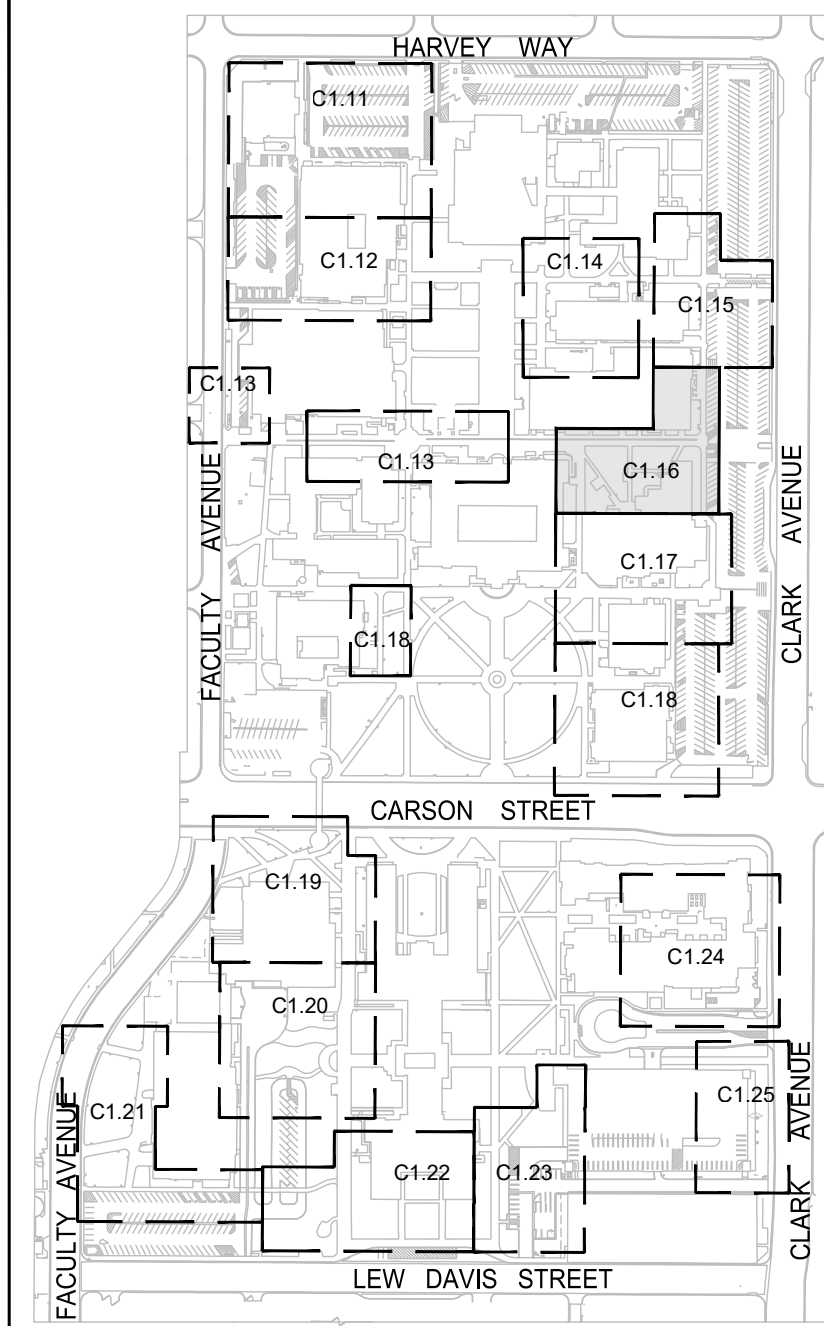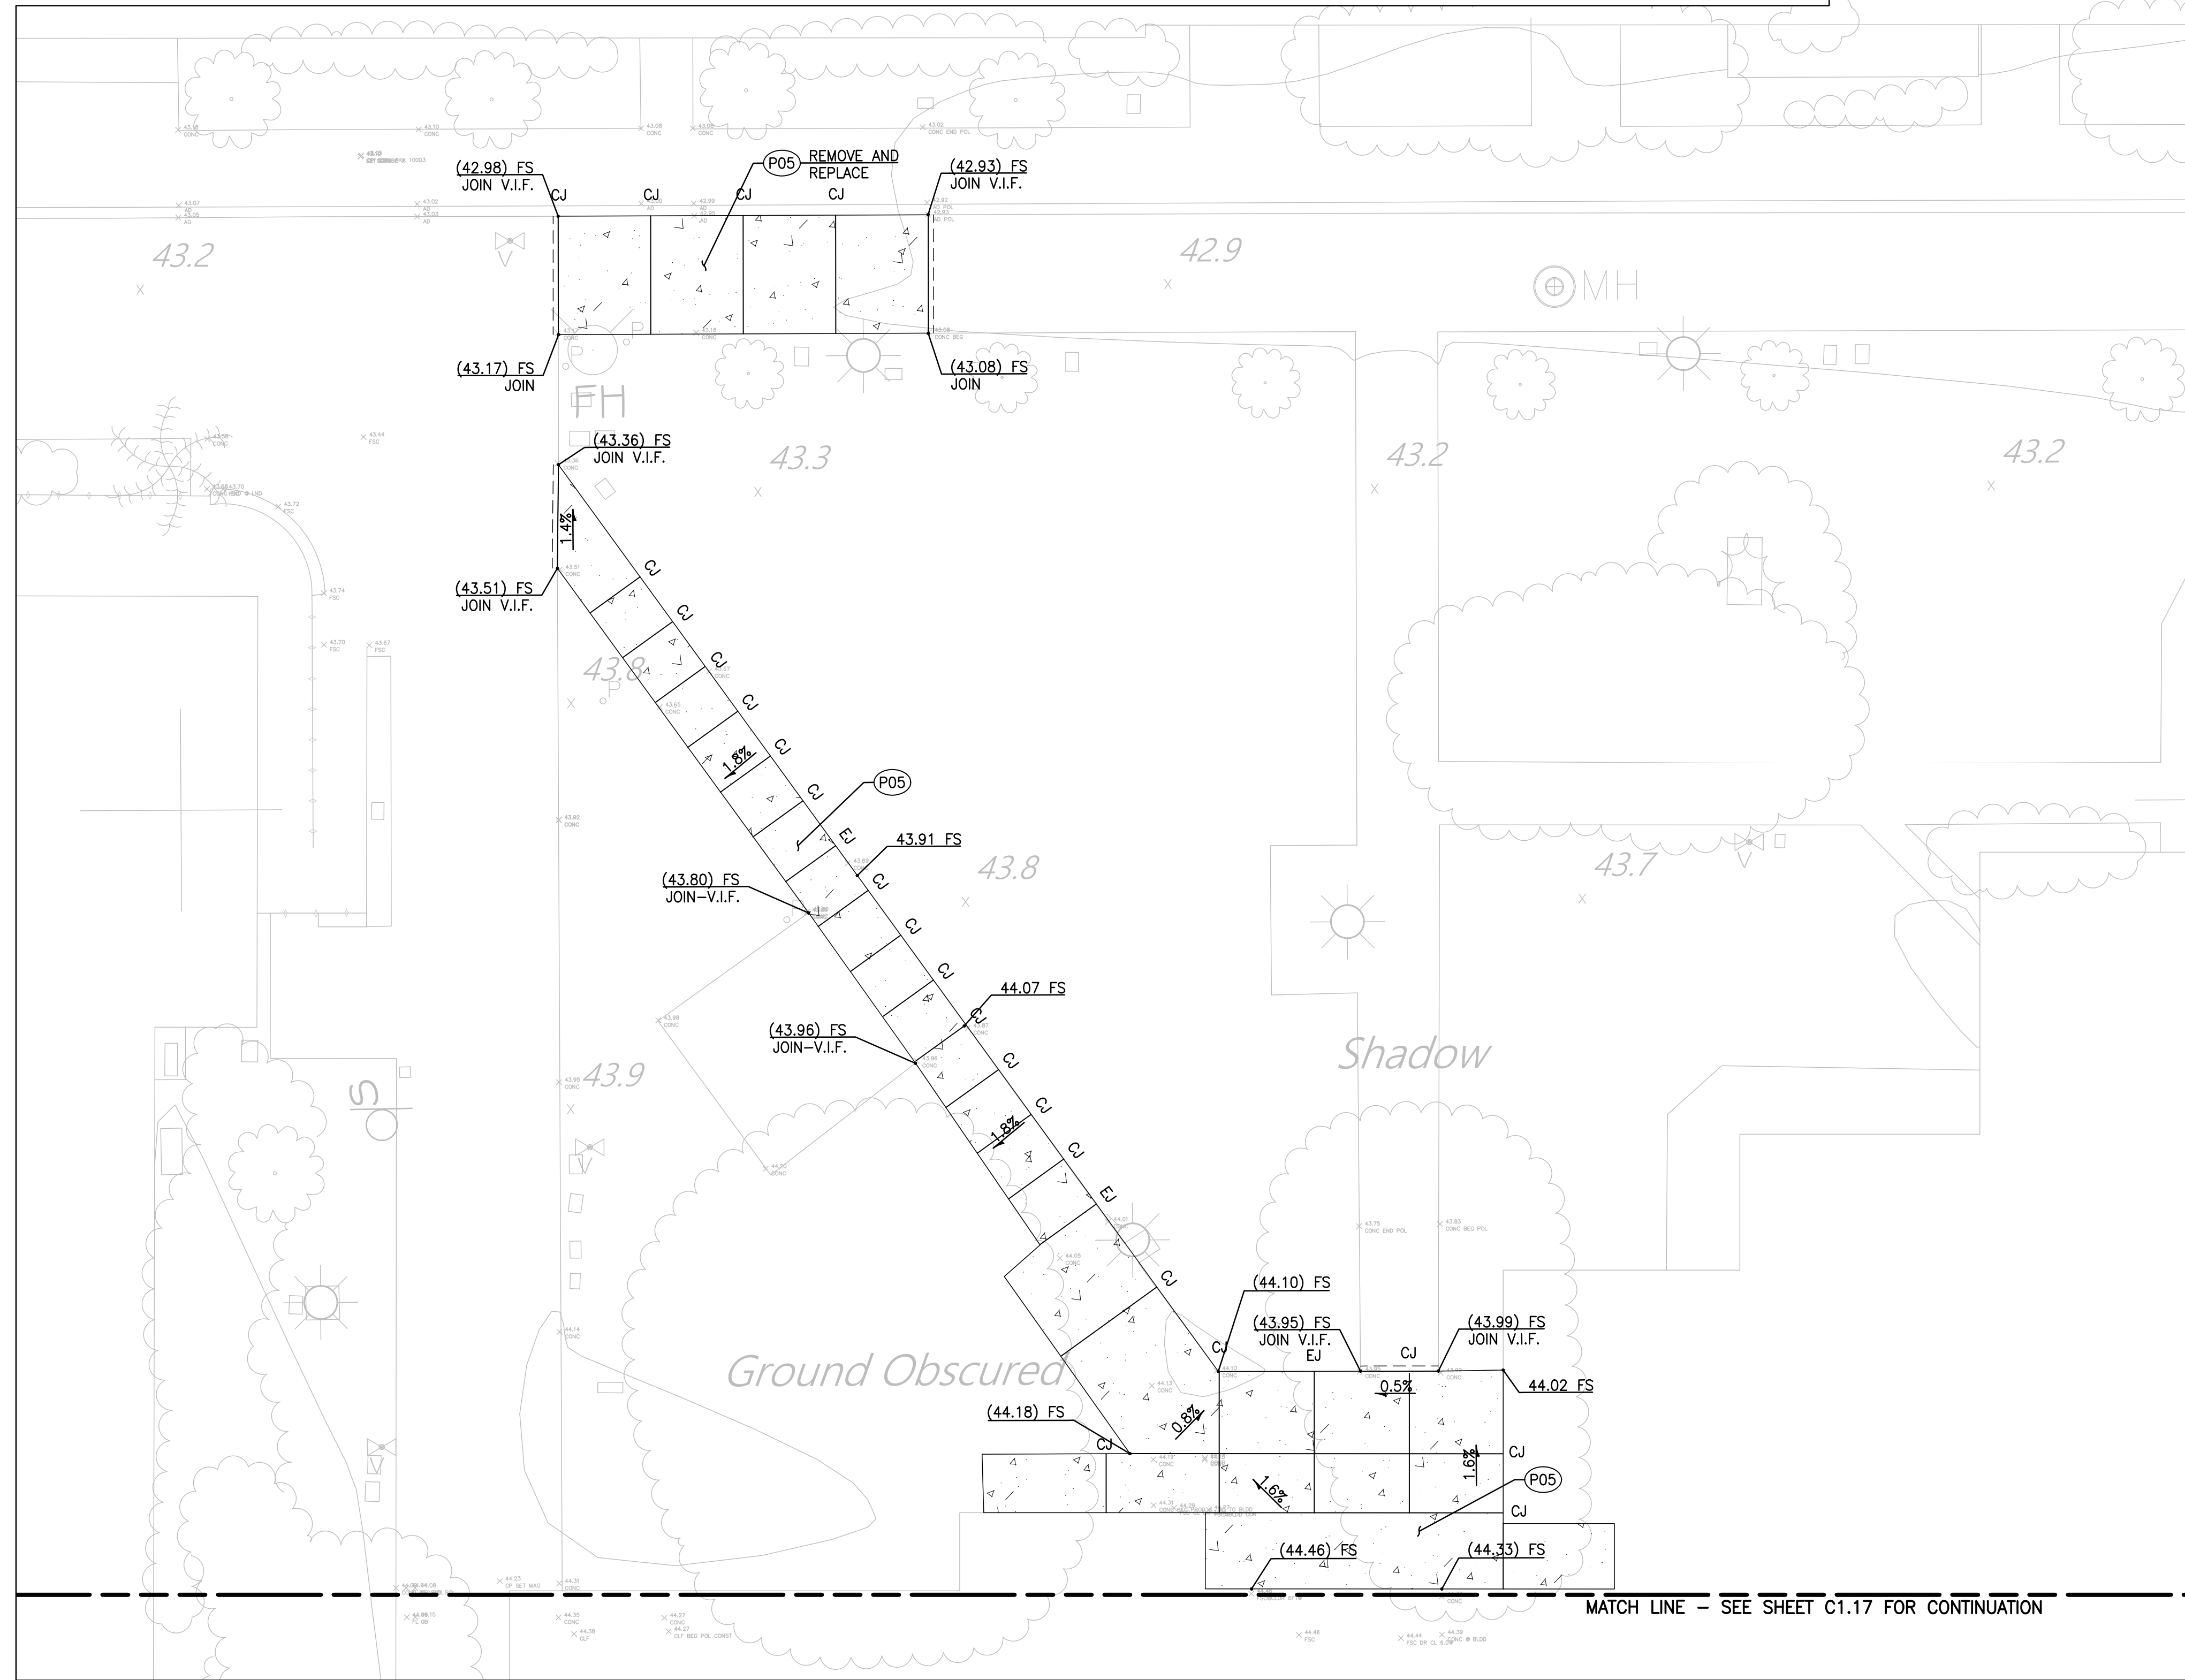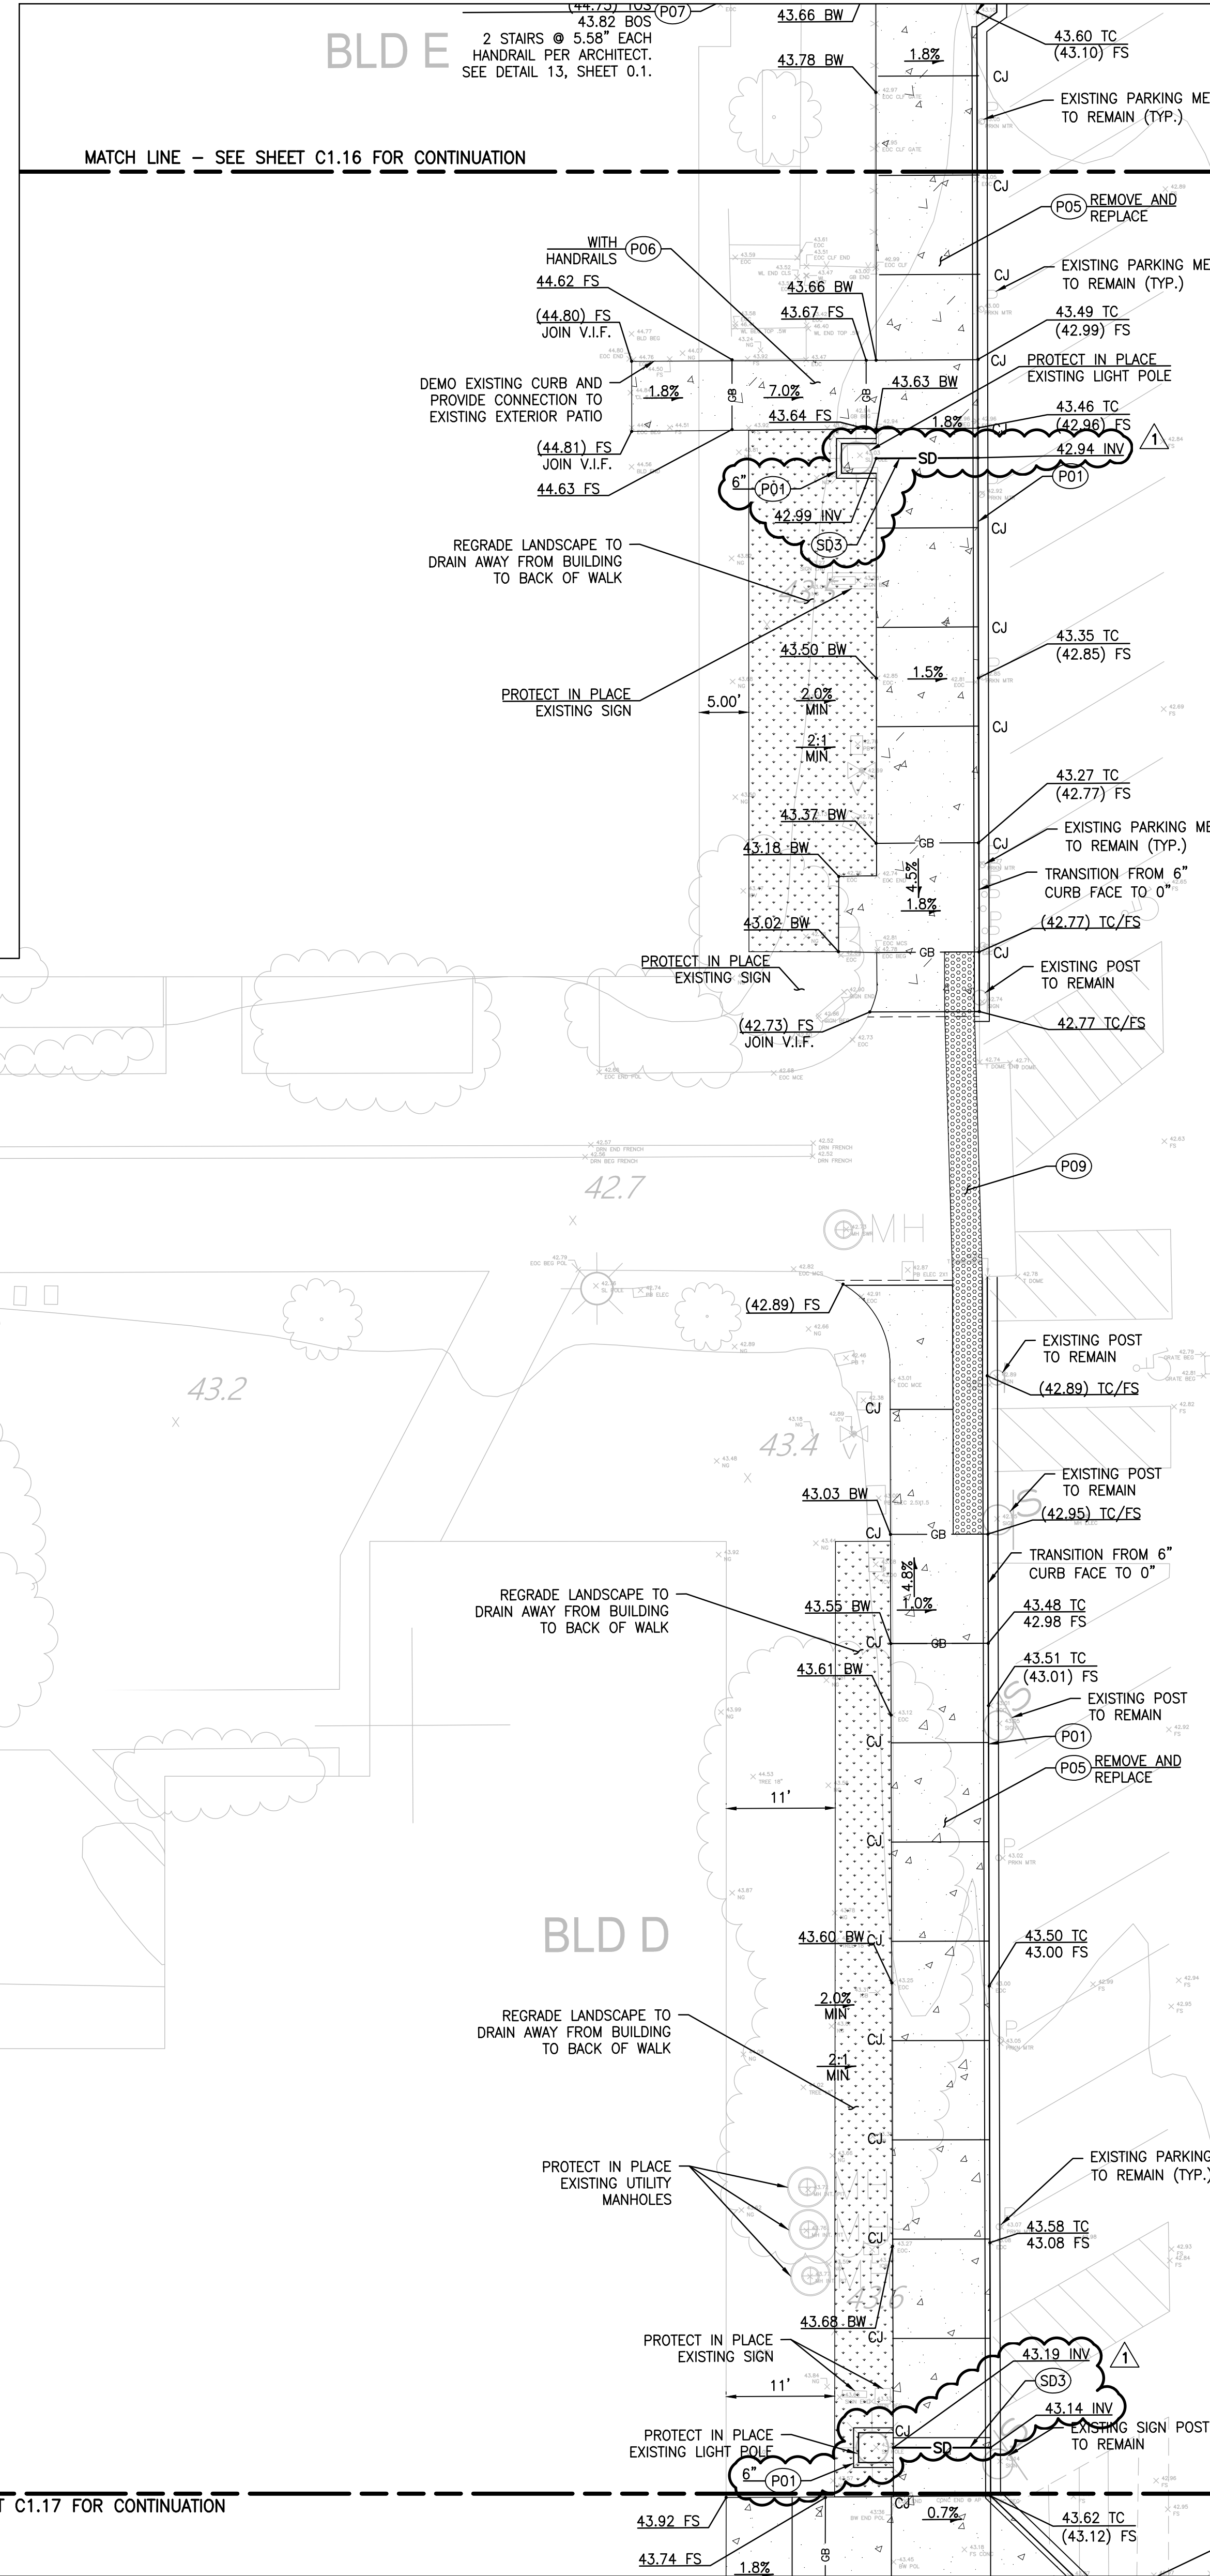

- (P01) CONCRETE CURB. PER DETAIL 1 ON SHEET C5.00.
- (P02) CONCRETE CURB AND GUTTER. PER DETAIL 2 ON SHEET C5.00.
- (P03) CONCRETE VALLEY GUTTER. PER DETAIL 3 ON SHEET C5.00.
- (P04) ASPHALT CONCRETE PAVEMENT. PER DETAIL 9 ON SHEET C5.00.
- (P05) CONCRETE WALK. PER DETAIL 4 ON SHEET C5.00.
- (P06) CURB RAMP. PER DETAIL 5 ON SHEET C5.00. HANDRAILS PER ARCHITECTURAL PLAN 0.1 WHERE REQUIRED.
- (P07) CONCRETE STAIRS ON GRADE PER DETAIL 6 ON SHEET C5.00.
- (P08) TRENCH DRAIN PER DETAIL 7 ON SHEET C5.00
- (P09) TRUNCATED DOMES PER DETAIL 8 ON SHEET C5.00. CAST-IN-PLACE YELLOW EXCEPT WHERE NOTED.
- (P10) ROLLED CURB PER DETAIL 3, SHEET C5.01.
- (P11) RESET EXISTING PAVERS.
- (P12) CONDITIONS MAY CHANGE PRIOR TO CONSTRUCTION DUE TO KINESIOLOGY FIELDS AND AQUATIC CENTER PROJECT.
- (P13) GRIND DOWN EDGE OF EXISTING CONCRETE WALK TO BE FLUSH WITH EXISTING GRADE TO PREVENT DIFFERENCE $> 1/4"$.
- (P14) CONTROL JOINT PER DETAIL 1, SHEET C5.01.
- (P15) WHEEL STOP PER DETAIL 5, SHEET C5.01.
- (P16) REMOVE EXISTING BRICK PAVERS AND REPLACE TO MATCH EXISTING PATTERN AND COLOR. GRADE CONCRETE BASE TO PROPOSED GRADES HEREON. 4"x8" BRICK PAVERS GROUVED OVER CONCRETE BASE. PARQUET PATTERN.

STORM DRAIN

(SD1) PVC, SDR-35 STORM DRAIN PIPE PER DETAIL 10, SHEET C5.00. SIZE PER PLAN.

(SD2) AREA DRAIN, PER DETAIL 11, SHEET C5.00.

 LIMIT OF WORK
 PROPERTY LINE
 SAWCUT AND JOIN
 STORM DRAIN
 PATH OF TRAVEL - FOR INFORMATIONAL PURPOSES ONLY

 CONCRETE PAVING
(REFER TO SHEET C5.00 FOR DETAILS)




ASPHALT
(REFER TO SHEET C5.00 FOR DETAILS)

 PLANTER AREA/LANDSCAPE
(REFER TO LANDSCAPING PLANS FOR DETAILS)





 TRUNCATED DOME
(REFER TO SHEET C5.00 FOR DETAILS)


NOTE TO CONTRACTOR/CONSTRUCTION SURVEYOR:

CONSTRUCTION STAKING FOR IMPROVEMENTS SHOWN ON THESE PLANS SHALL BE PERFORMED BY A LICENSED LAND SURVEYOR. ANY DISCREPANCIES BETWEEN THE PLANS AND FIELD CONDITIONS SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT PRIOR TO THE START OF CONSTRUCTION SO THAT A CLARIFICATION CAN BE ISSUED.

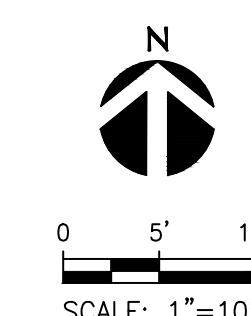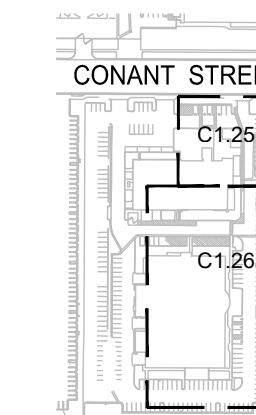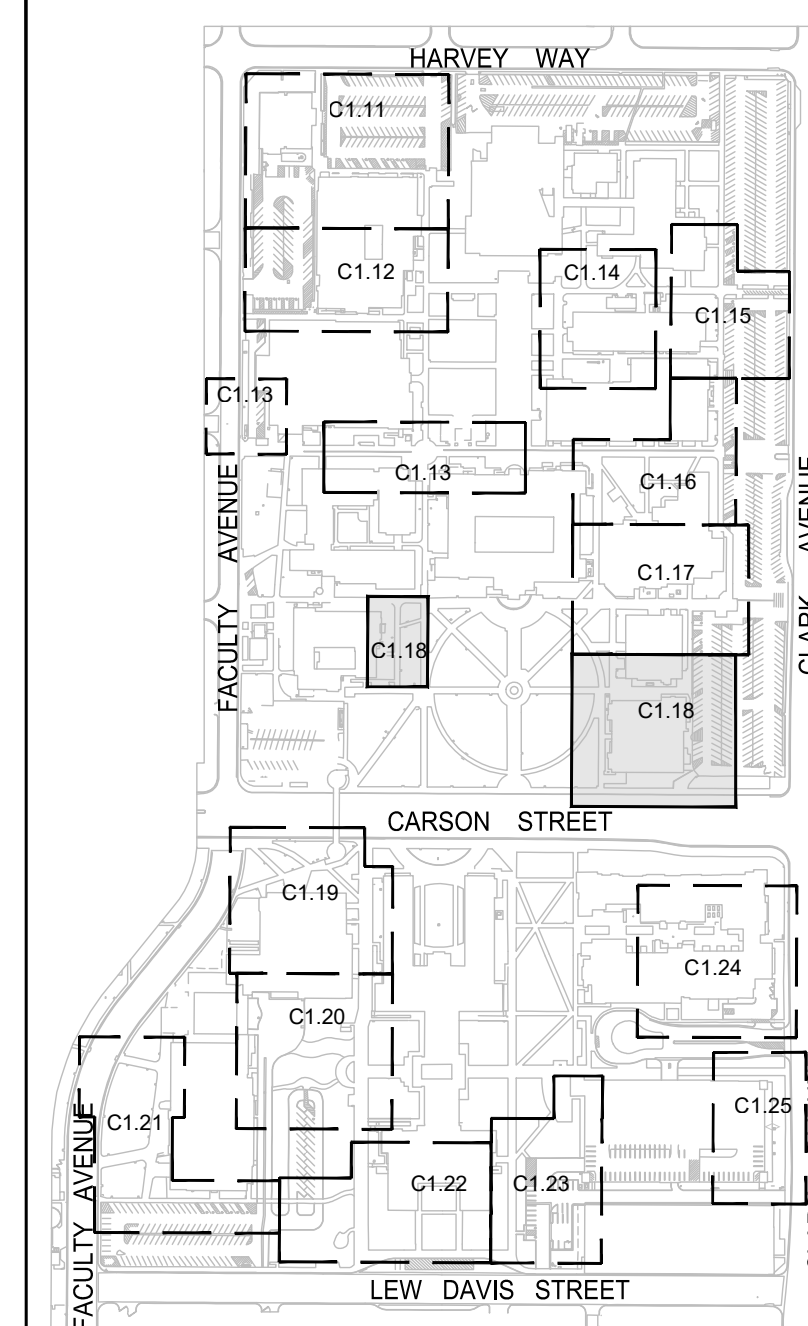

MATCH LINE - SEE SHEET C1.14 FOR CONTINUATION

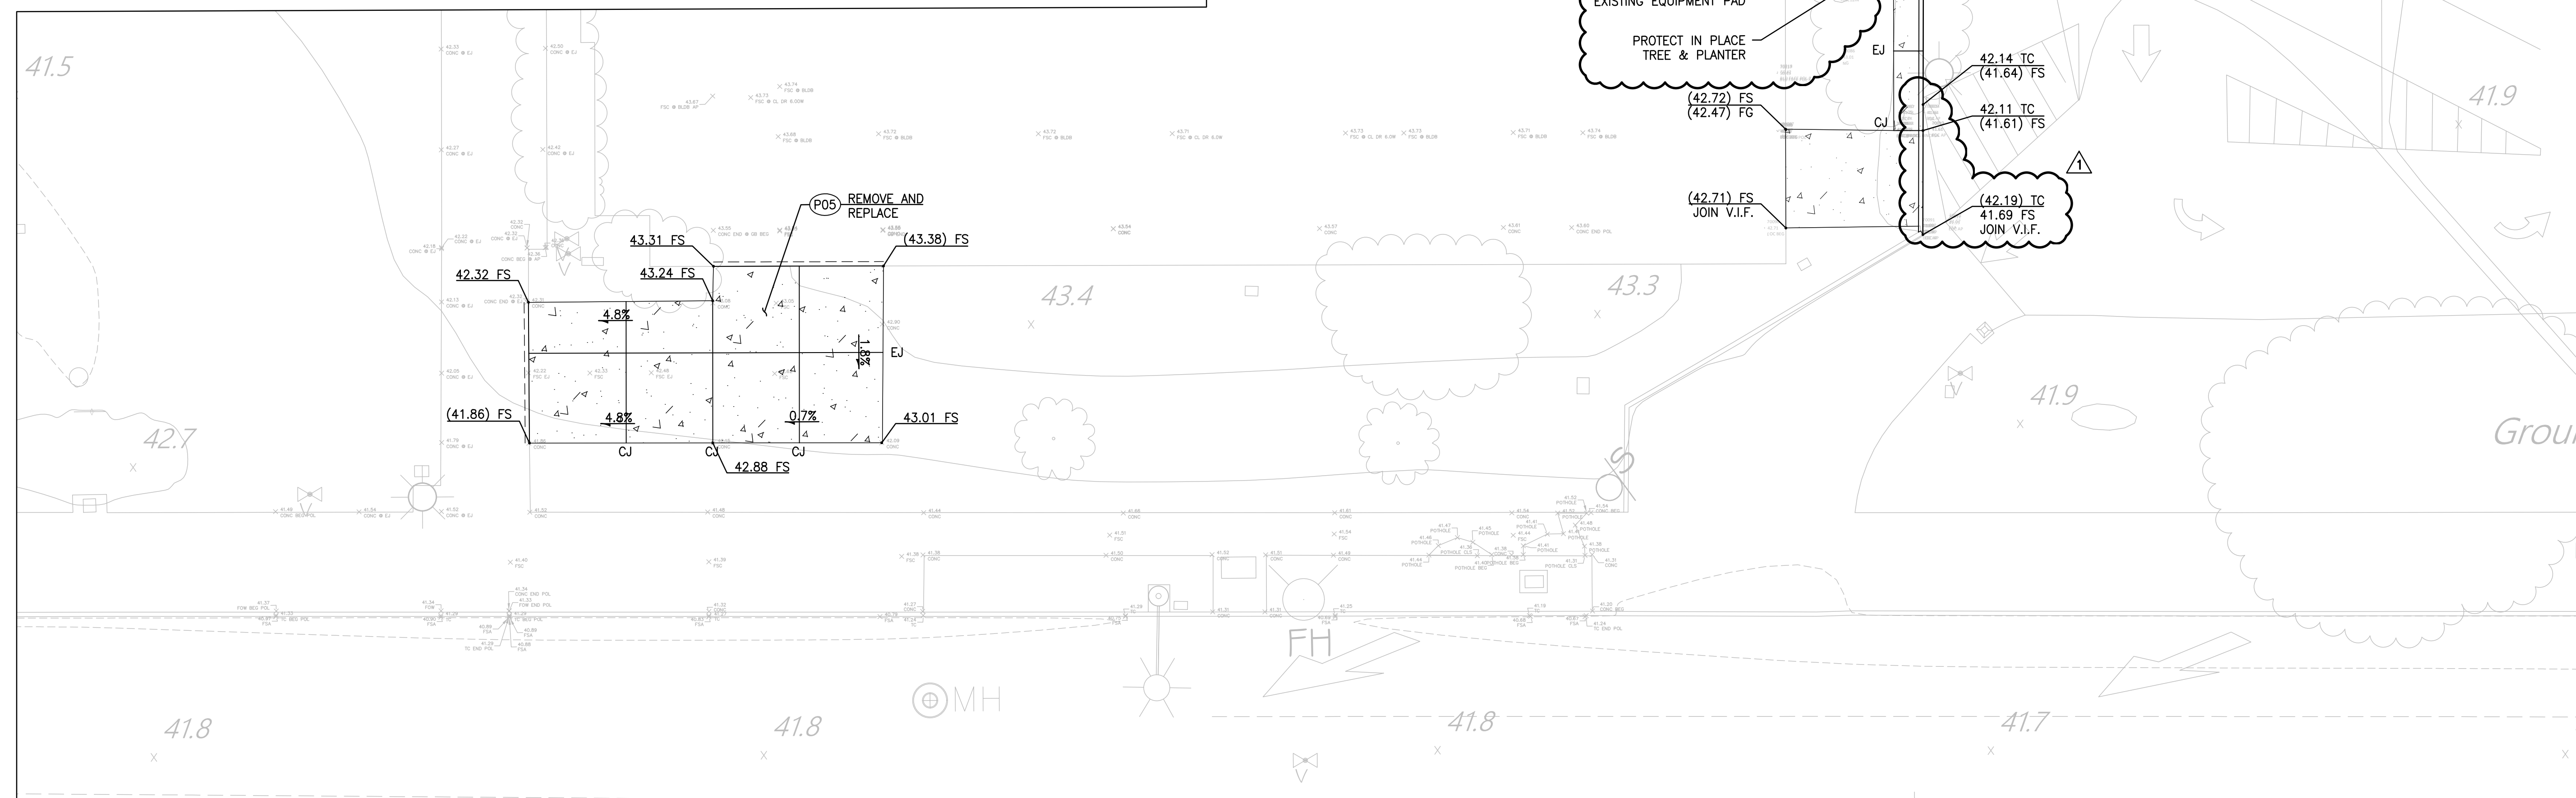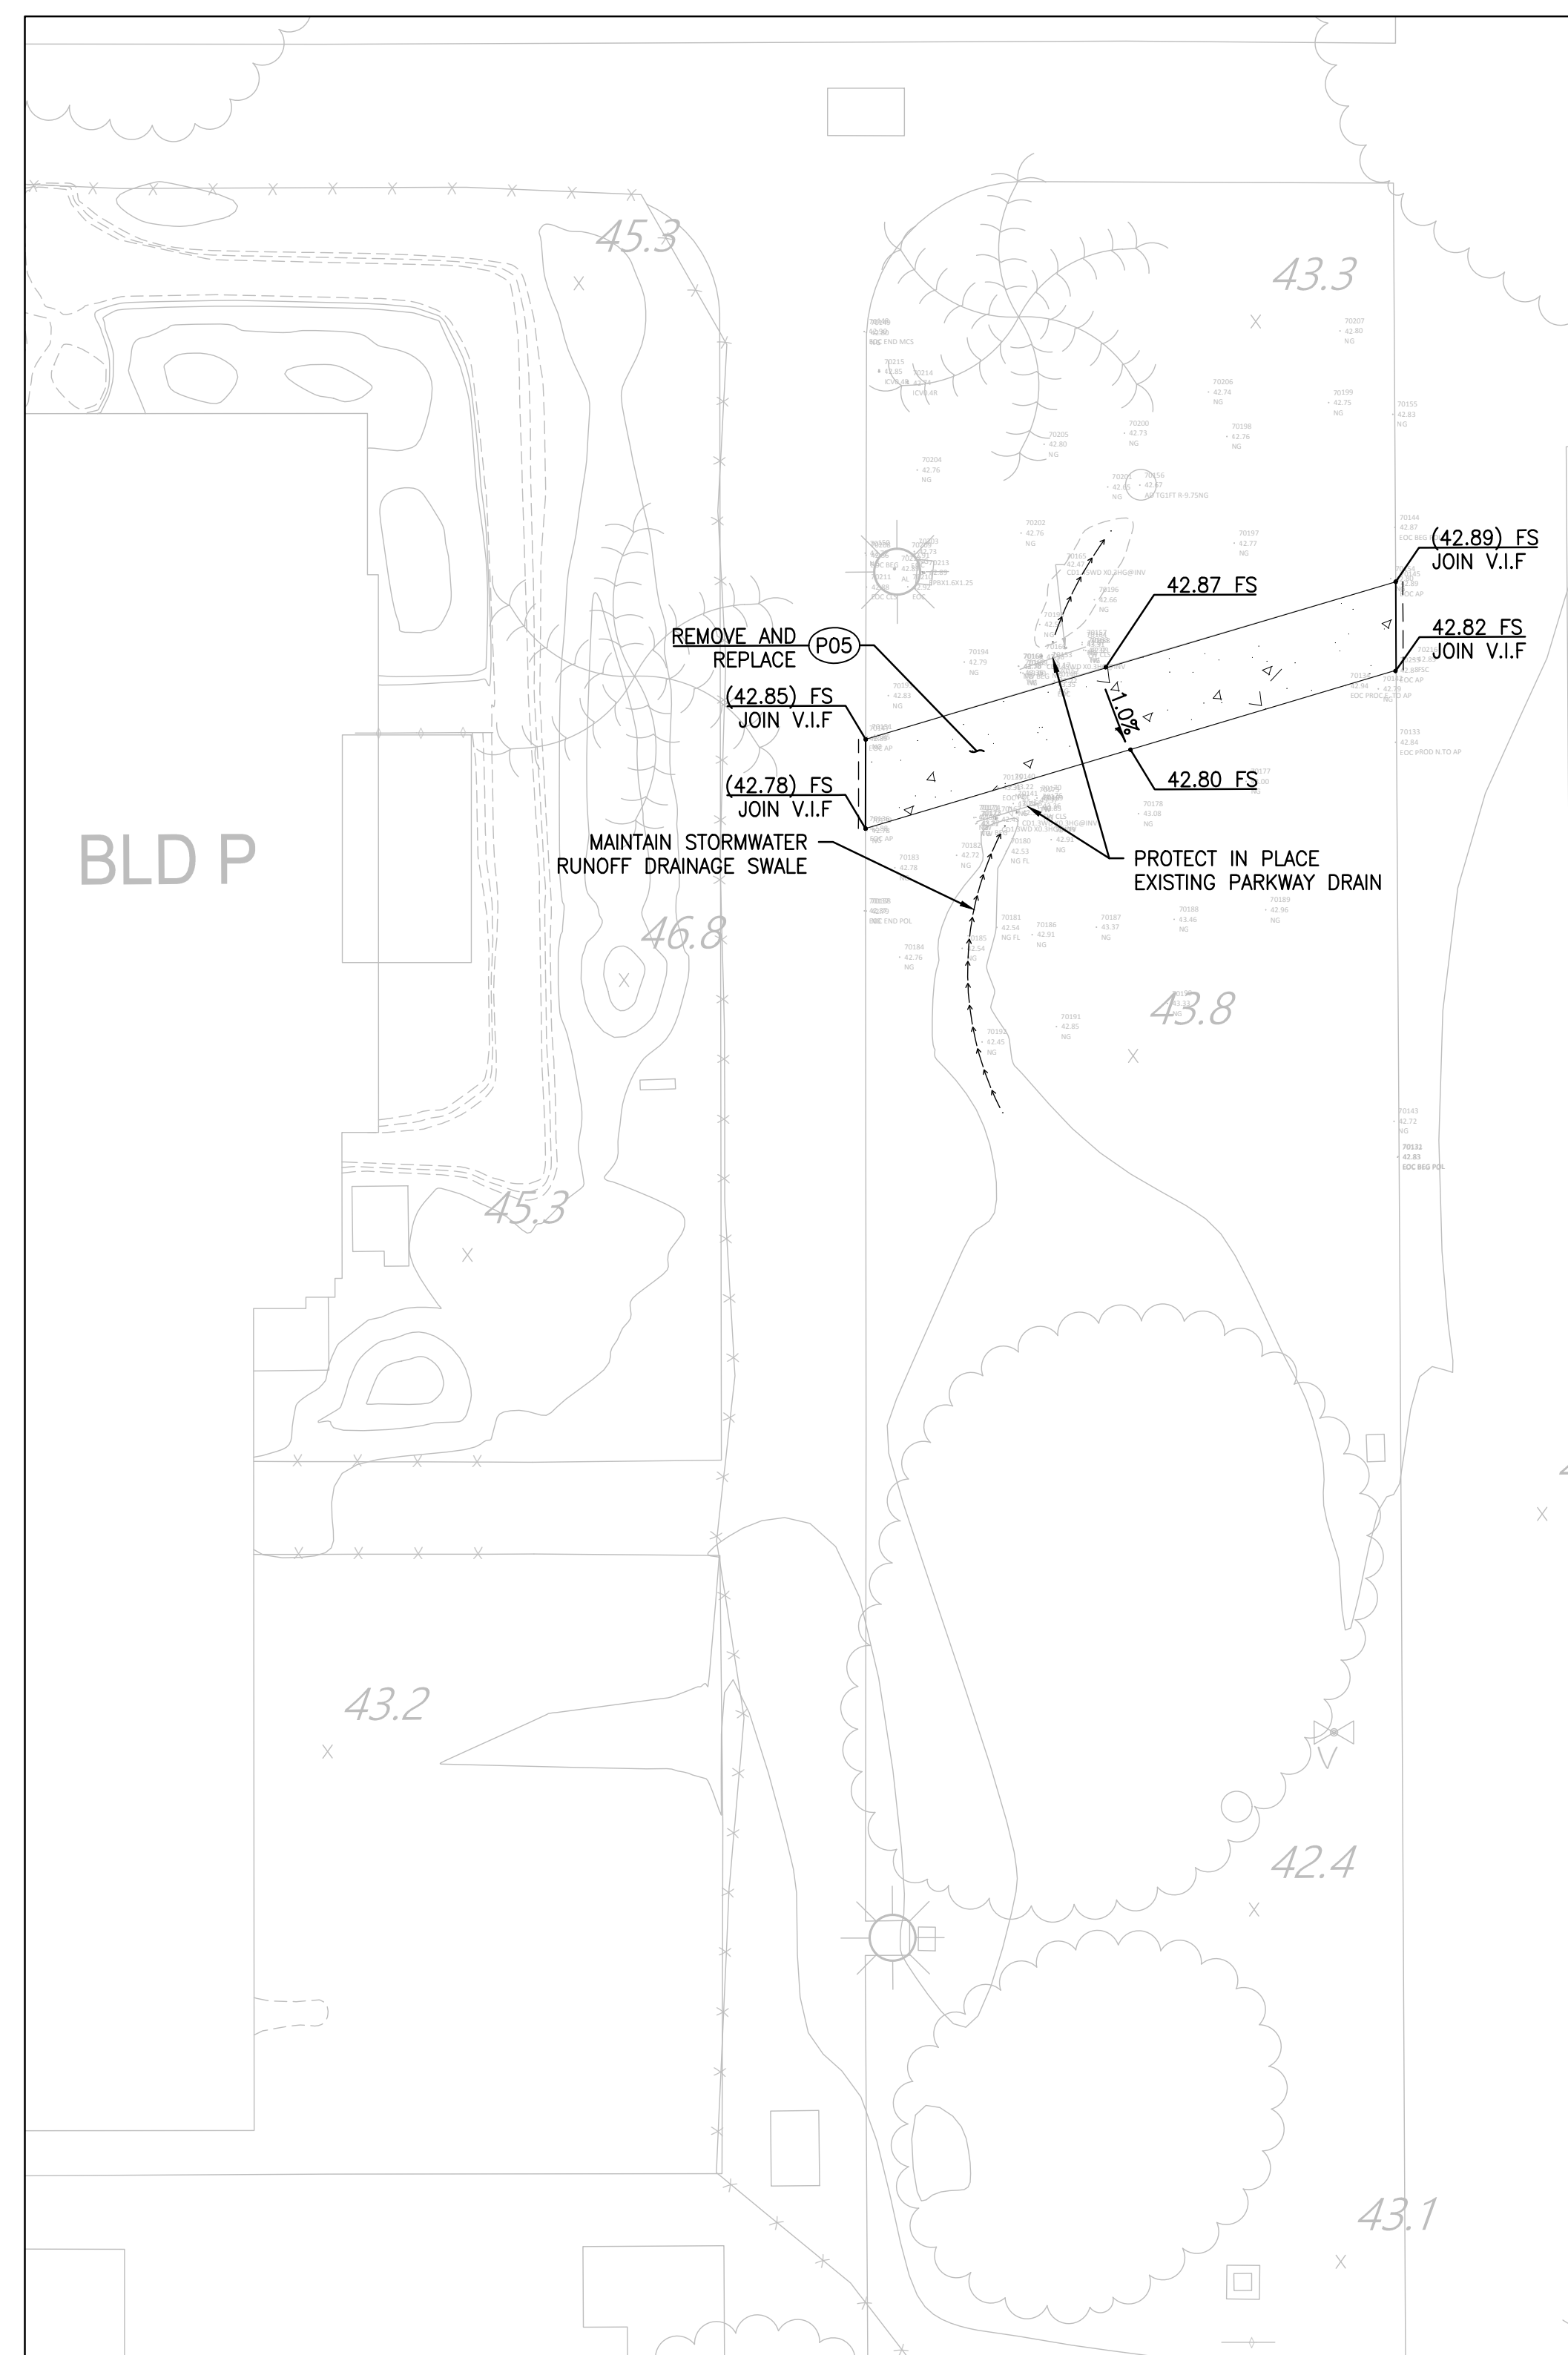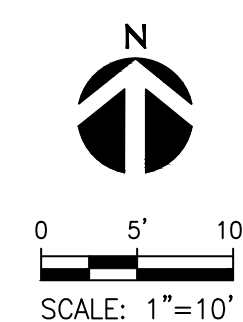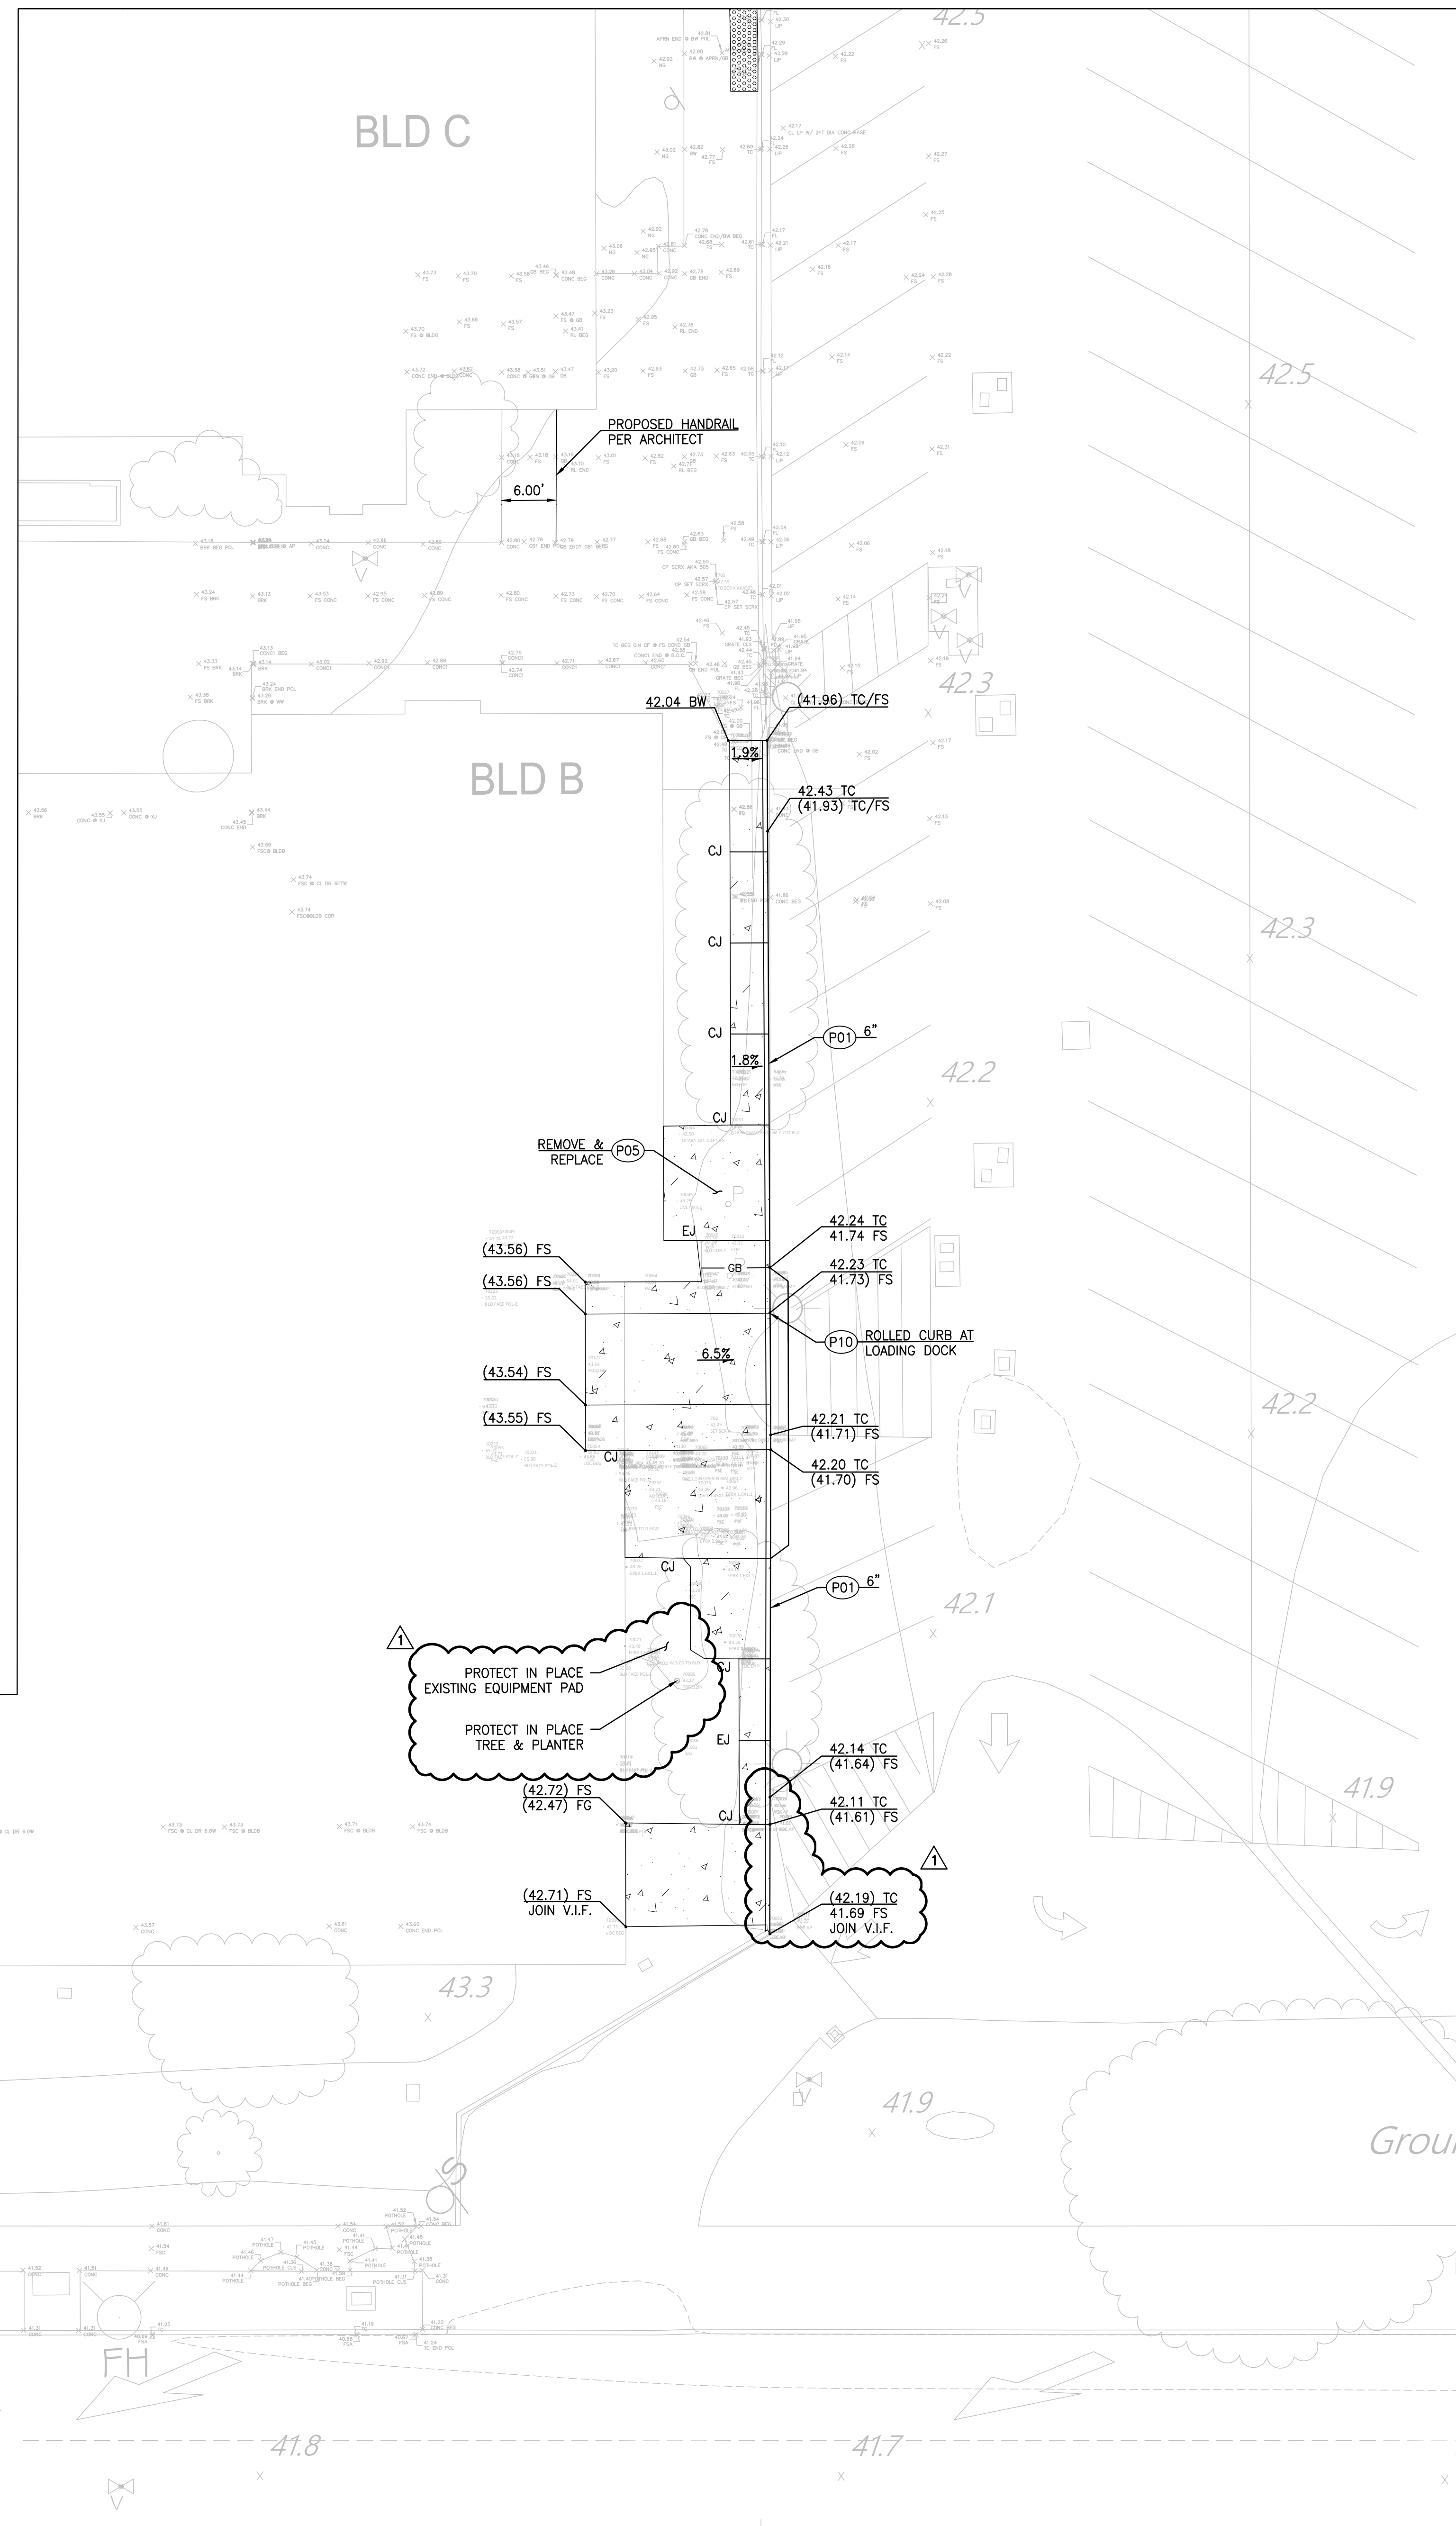

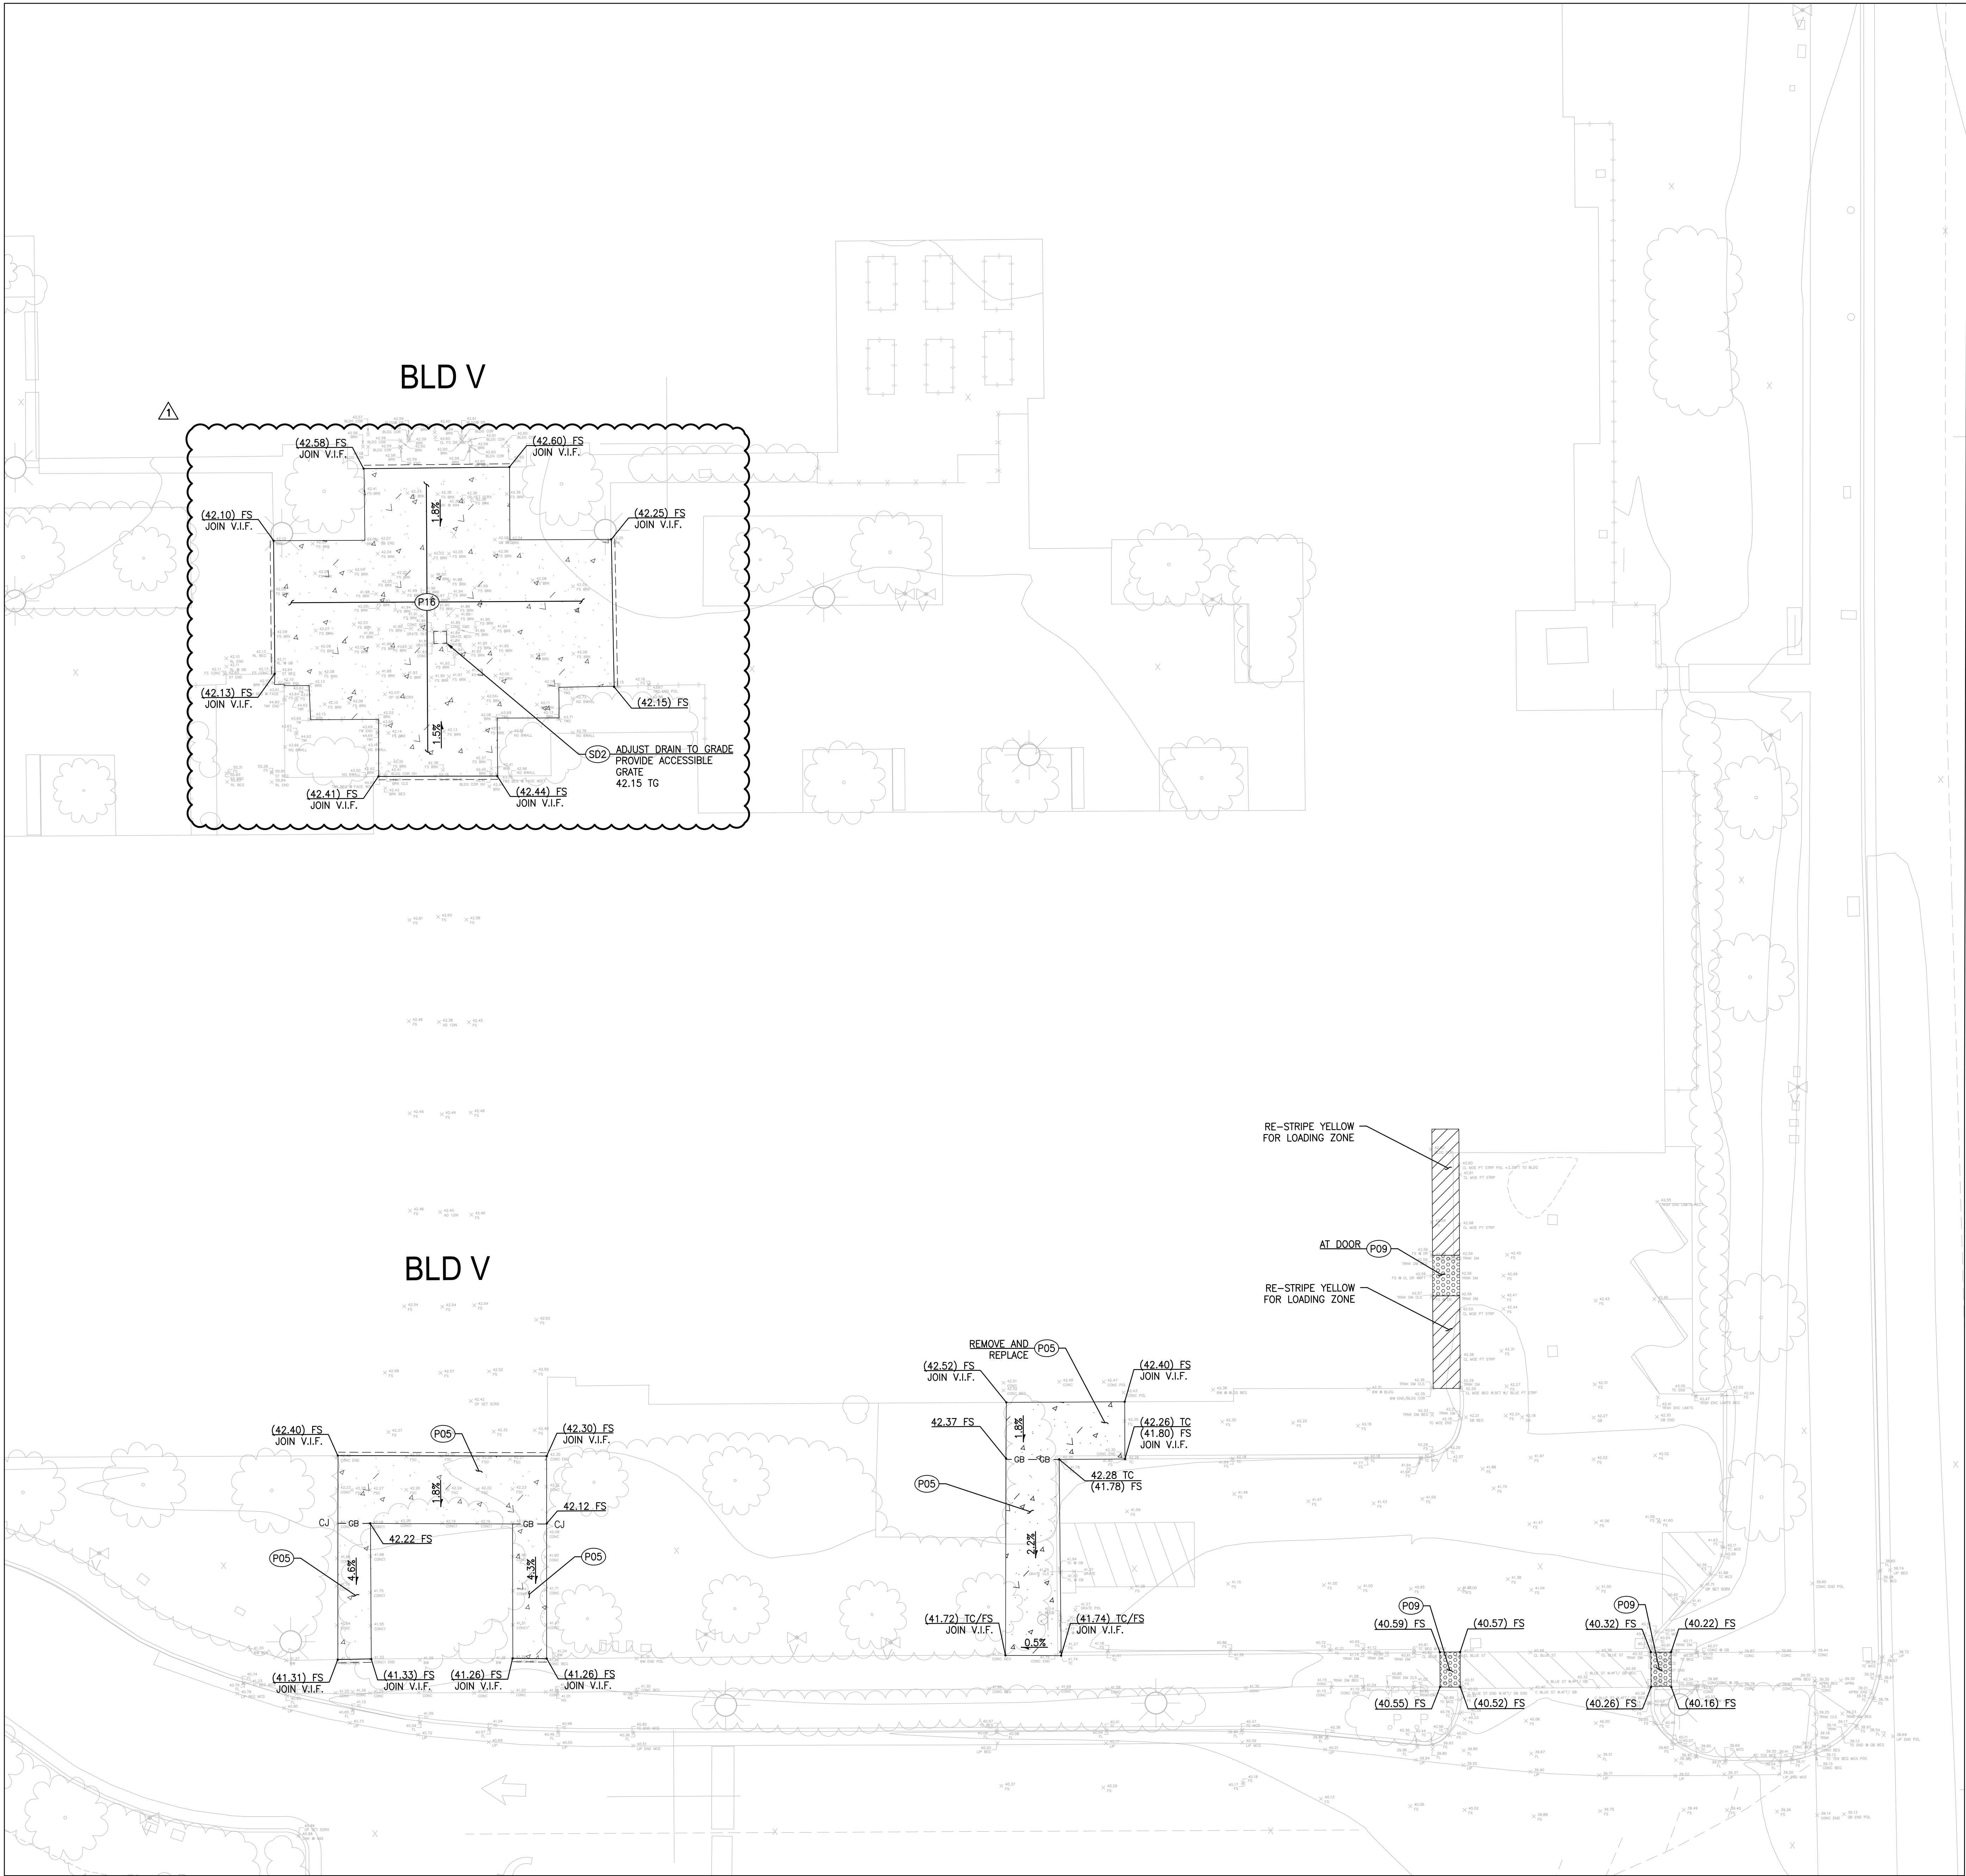




PAVING CONSTRUCTION NOTES

- (P01) CONCRETE CURB. PER DETAIL 1 ON SHEET C5.00.
(P02) CONCRETE CURB AND GUTTER. PER DETAIL 2 ON SHEET C5.00.
(P03) CONCRETE VALLEY GUTTER. PER DETAIL 3 ON SHEET C5.00.
(P04) ASPHALT CONCRETE PAVEMENT. PER DETAIL 9 ON SHEET C5.00.
(P05) CONCRETE WALK. PER DETAIL 4 ON SHEET C5.00.
(P06) CURB RAMP. PER DETAIL 5 ON SHEET C5.00. HANDRAILS PER ARCHITECTURAL PLAN 0.1 WHERE REQUIRED.
(P07) CONCRETE STAIRS ON GRADE PER DETAIL 6 ON SHEET C5.00.
(P08) TRENCH DRAIN PER DETAIL 7 ON SHEET C5.00
(P09) TRUNCATED DOMES PER DETAIL 8 ON SHEET C5.00. CAST-IN-PLACE YELLOW EXCEPT WHERE NOTED.
(P10) ROLLED CURB PER DETAIL 3, SHEET C5.01.
(P11) RESET EXISTING PAVERS.
(P12) CONDITIONS MAY CHANGE PRIOR TO CONSTRUCTION DUE TO KINESIOLOGY FIELDS AND AQUATIC CENTER PROJECT.
(P13) GRIND DOWN EDGE OF EXISTING CONCRETE WALK TO BE FLUSH WITH EXISTING GRADE TO PREVENT DIFFERENCE > 1/4".
(P14) CONTROL JOINT PER DETAIL 1, SHEET C5.01.
(P15) WHEEL STOP PER DETAIL 5, SHEET C5.01.
(P16) REMOVE EXISTING BRICK PAVERS AND REPLACE TO MATCH EXISTING PATTERN AND COLOR. GRADE CONCRETE BASE TO PROPOSED GRADES HEREON. 4'x8" BRICK PAVERS GROUTED OVER CONCRETE BASE. PARQUET PATTERN

LEGEND

- LIMIT OF WORK
--- PROPERTY LINE
--- SAWCUT AND JOIN
--- SD --- STORM DRAIN
--- PATH OF TRAVEL --- FOR INFORMATIONAL PURPOSES ONLY
CONCRETE PAVING (REFER TO SHEET C5.00 FOR DETAILS)
ASPHALT (REFER TO SHEET C5.00 FOR DETAILS)
PLANTER AREA/LANDSCAPE (REFER TO LANDSCAPING PLANS FOR DETAILS)
TRUNCATED DOME (REFER TO SHEET C5.00 FOR DETAILS)

NOTE TO CONTRACTOR/CONSTRUCTION SURVEYOR:
CONSTRUCTION STAKING FOR IMPROVEMENTS SHOWN ON THESE PLANS SHALL BE PERFORMED BY A LICENSED LAND SURVEYOR. ANY DISCREPANCIES BETWEEN THE PLANS AND FIELD CONDITIONS SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT PRIOR TO THE START OF CONSTRUCTION SO THAT A CLARIFICATION CAN BE ISSUED.

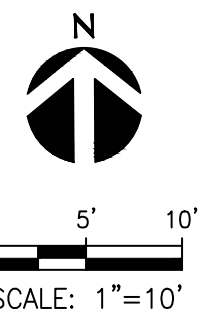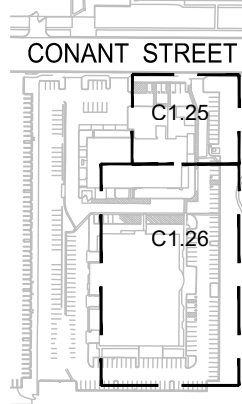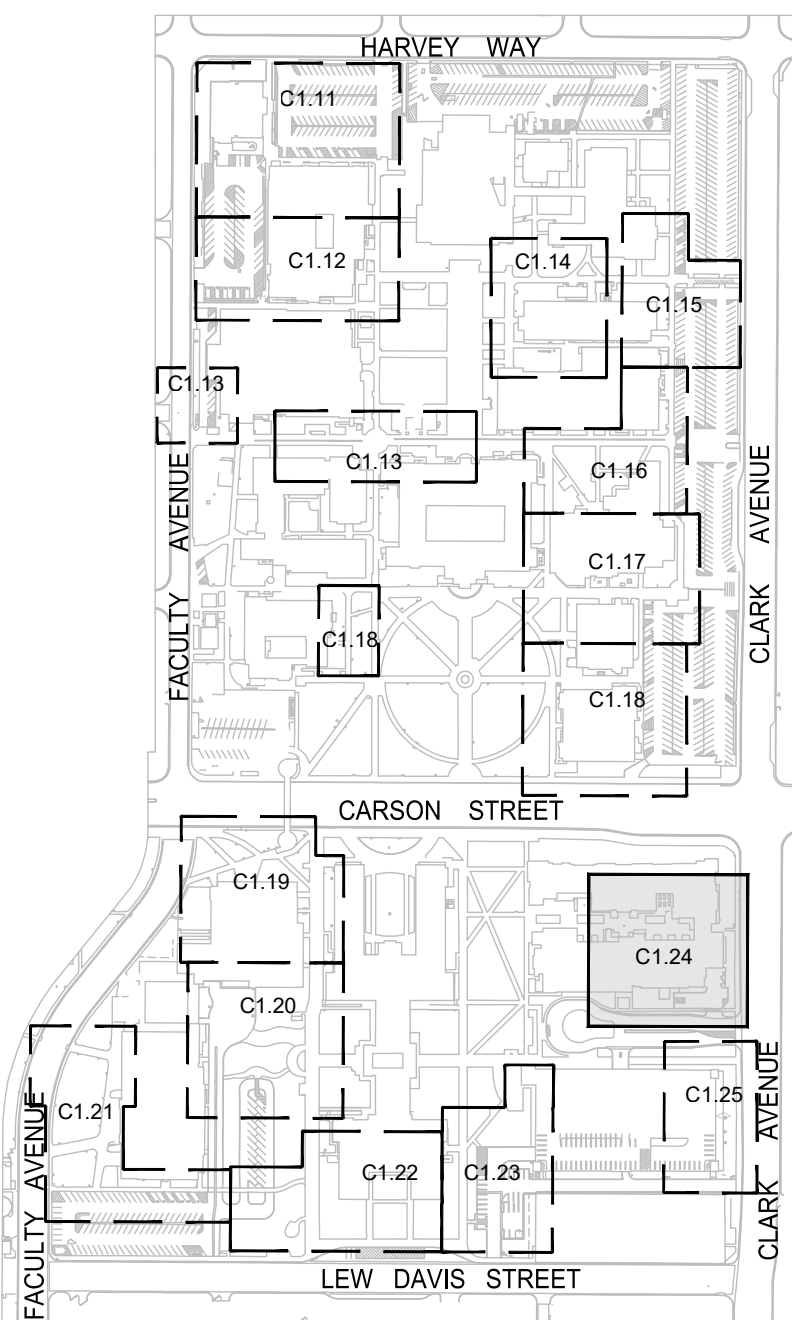

kpff
700 South Flower Street
Suite 2100
Los Angeles, CA 90017
O: 213.418.0201
F: 213.256.5294
www.kpff.com

DLR Group

LBCC - LIBERAL ART CAMPUS
BARRIER REMOVAL PROJECT

DSA SUBMITTAL

Issue Date 05.15.20
Revisions
1 Addendum 01 10.16.2020

75-18208-03
ADA IMPROVEMENT
PLAN

C1.24